
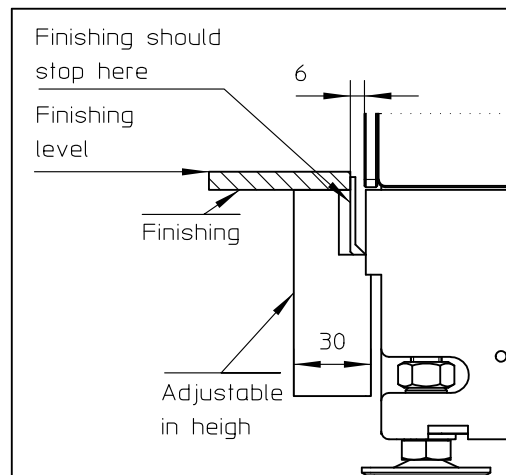
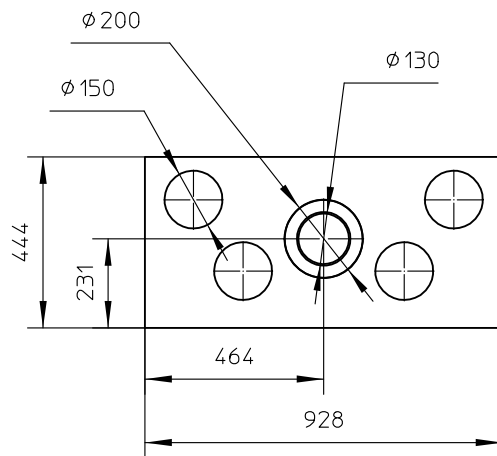
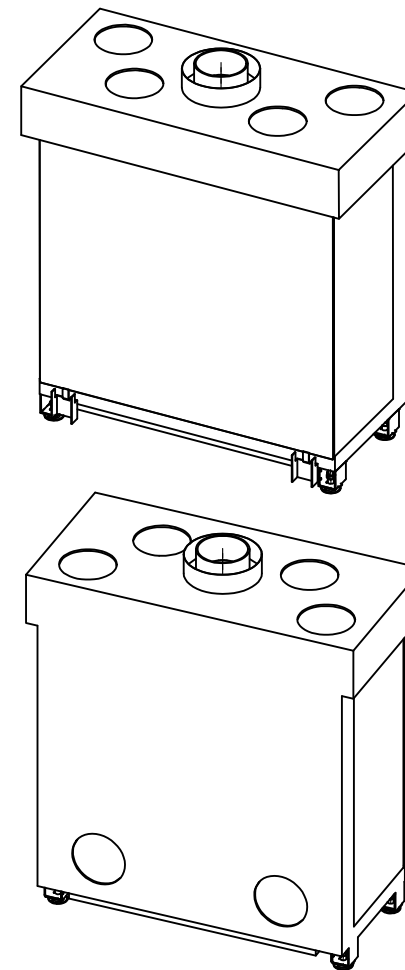
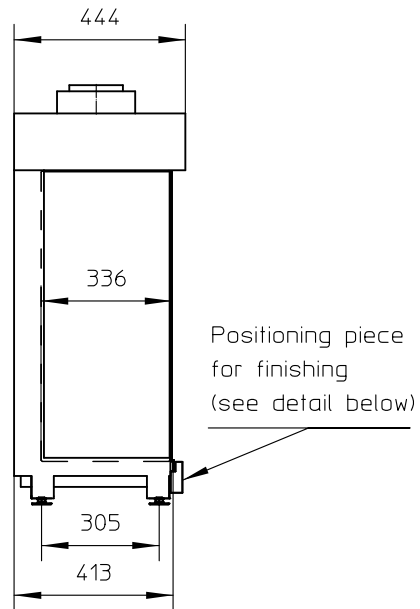


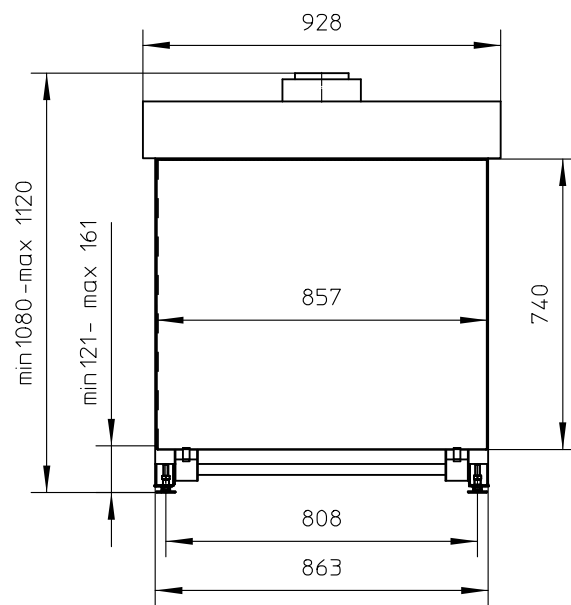

AVENUE^{Patented}

metalfire

Technical Document

AVENUE MF 800-75 GHE 3S

Dimensions (mm)

- combustion opening WxDxH: 857x336x740
- external WxDxH: 928x444x1120
- diameter flue: $\varnothing 130/200$ or $(*) \varnothing 100/150$

TECHNICAL DATA

- Gascat: I2E+, I2E, I2H, I2L, I2ELL
 - ECOLABEL: B
 - load input: 9,75 kW
 - load output: 8,10 kW
 - efficiency capacity: 84,5 %
 - type of gas/pressure: G20/G25
-
- Gascat: I3B/P, I3+
 - ECOLABEL: B
 - load input: 8,70 kW
 - load output: 7,30 kW
 - efficiency capacity: 84,4 %
 - type of gas/pressure: G30/G31
-
- Appliance type: C11,C31,C91
C12,C32,C42,C52,C82
 - Weight: 100 kg
 - Convection air inlet: min350cm² (2x $\varnothing 150$)
 - Convection air outlet: min350cm² (2x $\varnothing 150$)

SPECIFICATIONS

- Only available with ceramics wood logs
- Ionization-protected pilot-flame
- Radiographic remote controle with thermostatic mode
- Inside finishing: heat-resistant black paint
- Gas/electrical connections at the left side (optional right side)

OPTIONS

- interior finishing: ORIGINAL (ribbed cast iron) 
- Standard (steel) 

First aid and technical support:


- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

www.metalfire.eu EN 613 CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
1/3

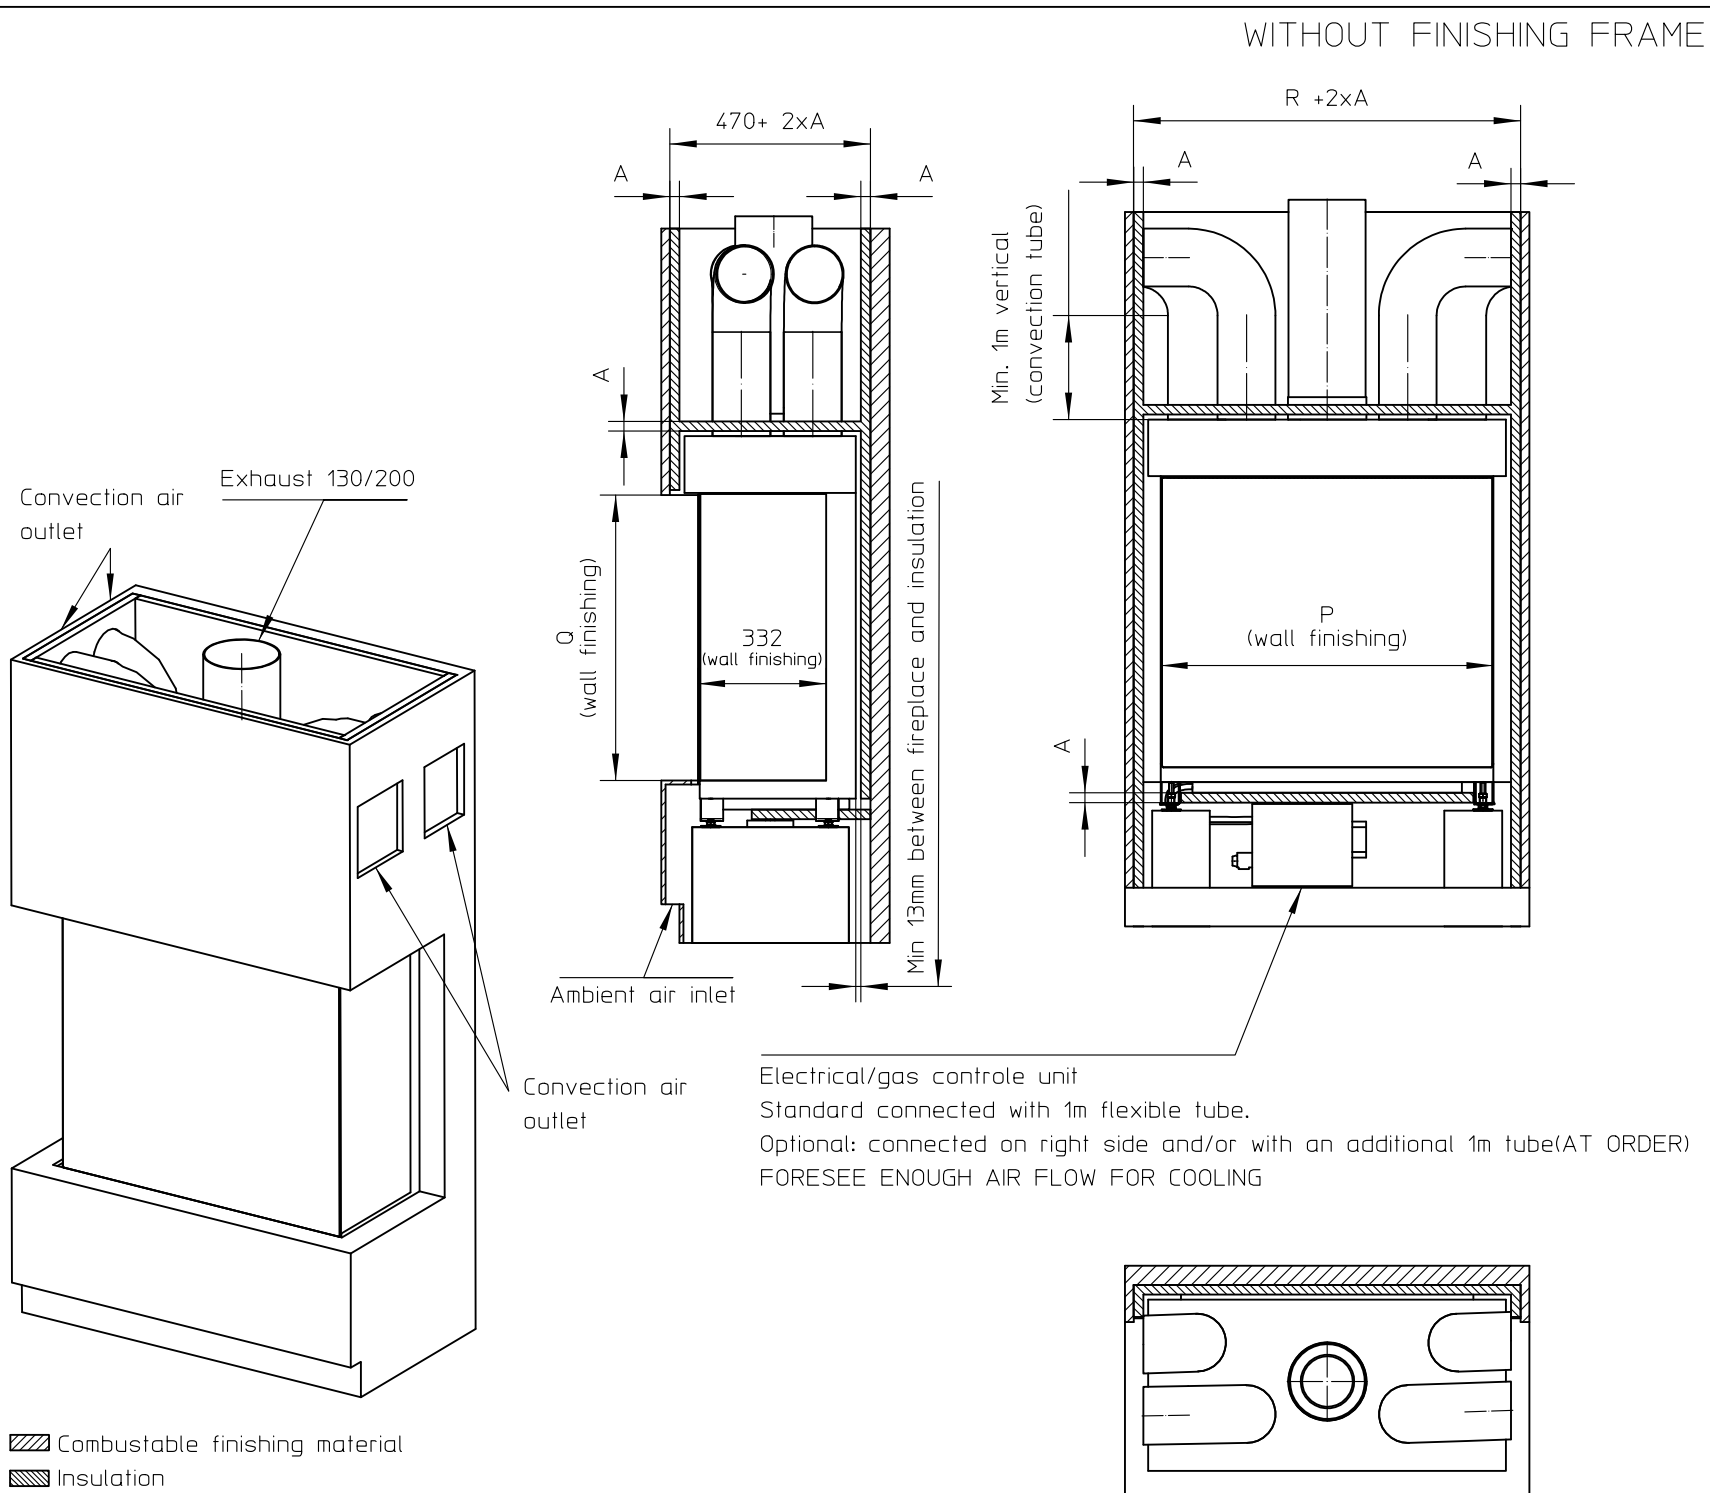

AVENUE						Patented
metalfire						
Technical Document						
AVENUE MF 800-75 GHE 3S						
Prescribed insulation thickness (mm)						
Combustable finishing material						
Metalfire recommended Promasil 1100L (TC=0,081 W/mk)				A = 25mm		
Non-combustable finishing material						
non-combustable materials structural building items EXCLUDED e.g load bearing walls				A = 0mm		
TC=thermal conductivity				TC=non-combustable		
Table: AVENUE MF 800-75 GHE 3S						
Installation dimensions (mm)						
P	Q	R	S	T	Z	
869	740	954	1049	766	NA	
First aid and technical support: - support@metalfire.eu - +32 (0)9 261 50 57						
scale 1:20						Rev.
www.metalfire.eu				EN 613	CE	
General dimensional tolerances up to 6mm Metalfire preserves the right to modify specifications without previous notice						Sheet 2/3

WITH FINISHING FRAME 90/10

AVENUE^{Patented}

metalfire

Technical Document

AVENUE MF 800-75 GHE 3S

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
Promasil 1100L
(TC=0,081 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g load bearing walls

A = 0mm

TC=thermot conductivity

TC=non-combustable

Table: AVENUE MF 800-75 GHE 3S

Installation dimensions (mm)

P	Q	R	S	T	Z
869	740	954	1049	766	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57





scale 1:20

Rev.


www.metalfire.eu EN 613 CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
3/3

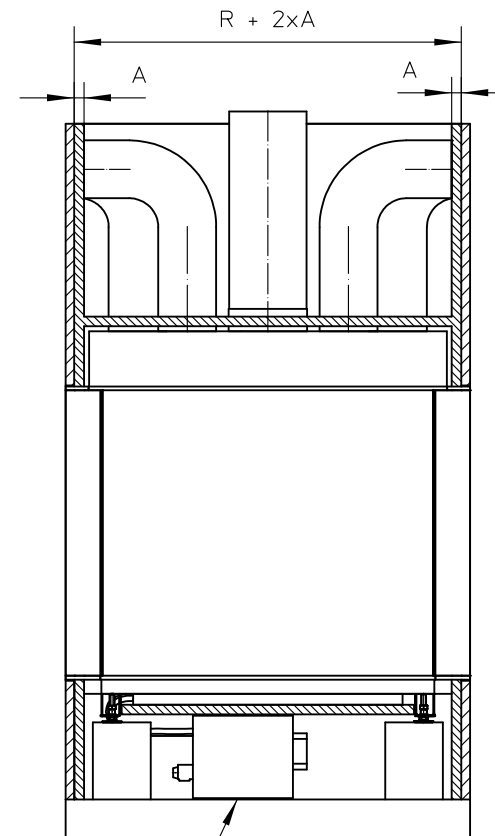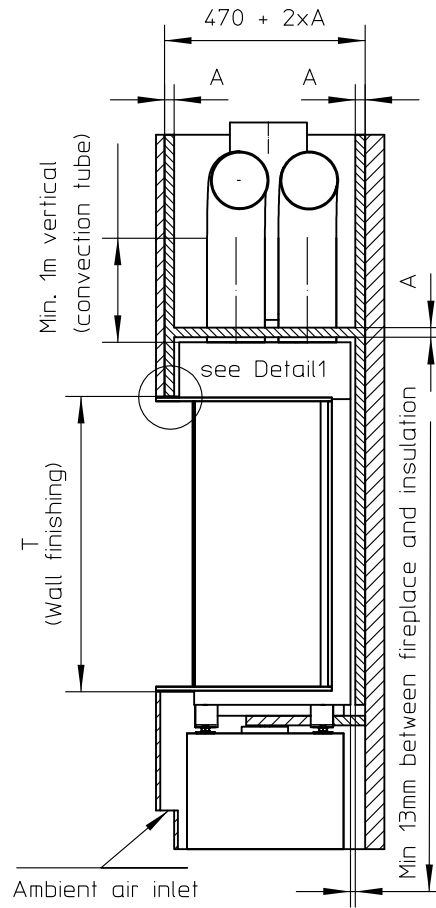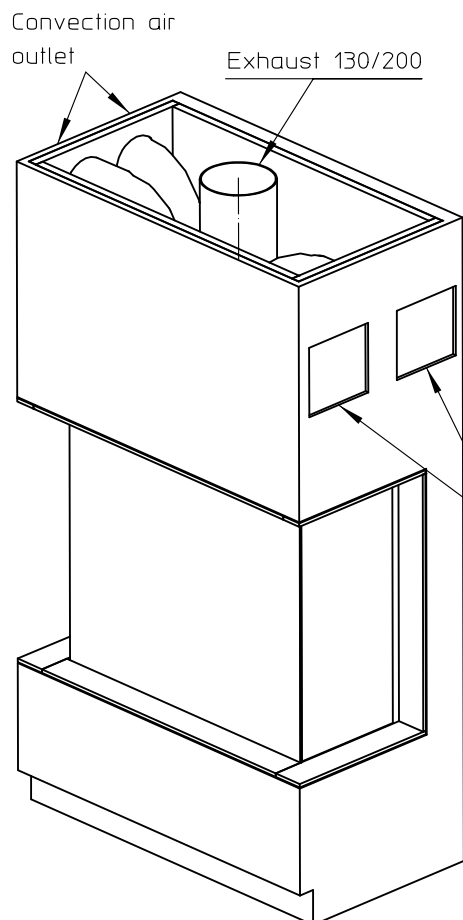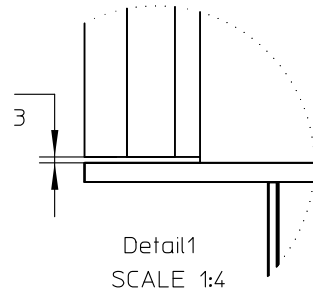

Electrical/gas controle unit
Standard connected with 1m flexible tube.
Optional: connected on right side and/or with an additional 1m tube(AT ORDER)
FORESEE ENOUGH AIR FLOW FOR COOLING

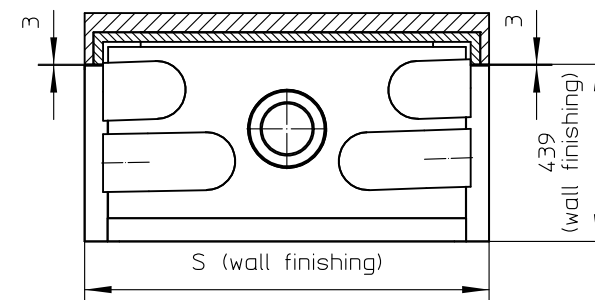

Combustable finishing material

Insulation

Insulation thickness = > see table