
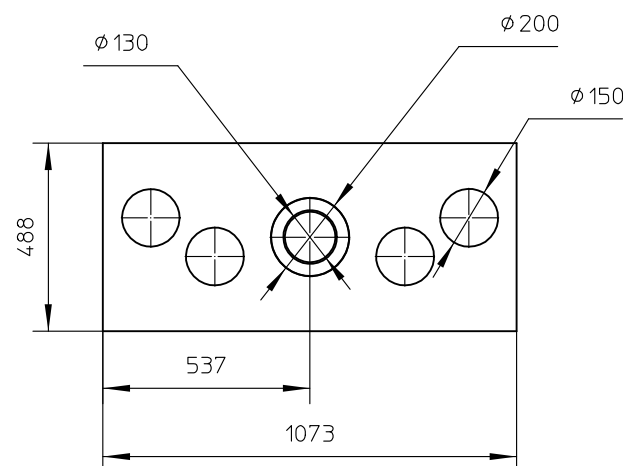
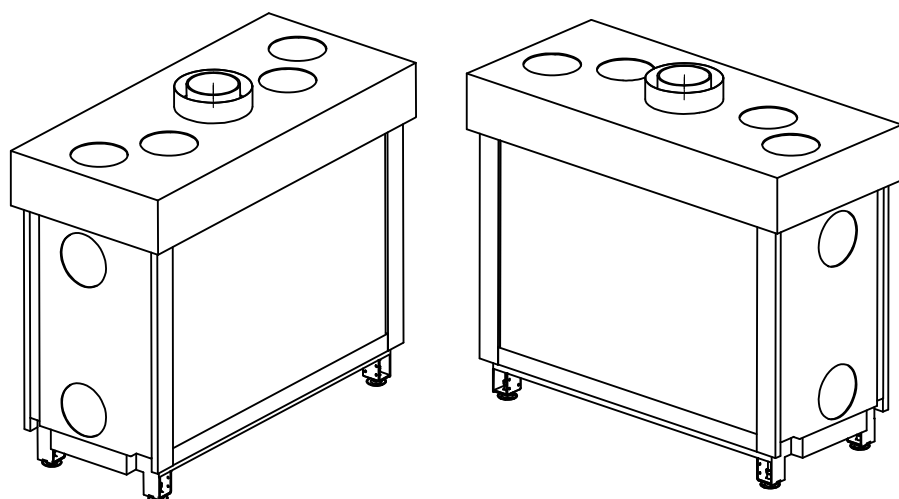
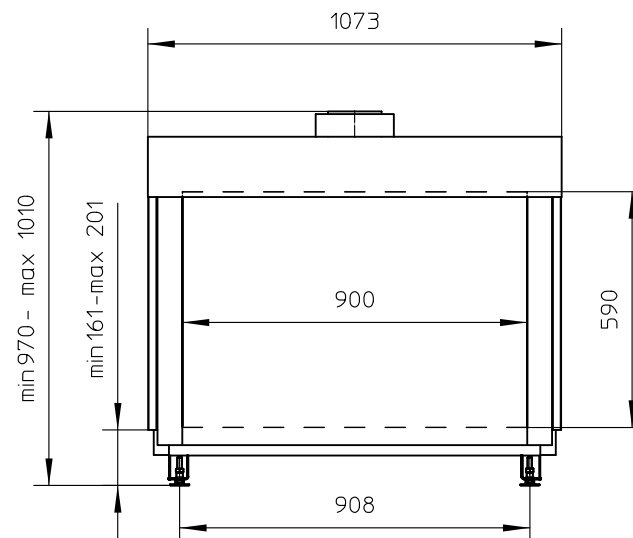


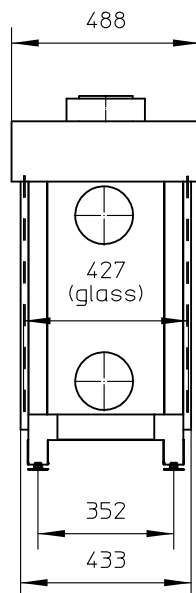

AVENUE Patented

metalfire

Technical Document

AVENUE MF 900-60 GHE T

Dimensions (mm)

- combustion opening WxH: 900x590
- external WxDxH: 1073x488x1010
- diameter flue: $\phi 130/200$ or $(*) \phi 100/150$

TECHNICAL DATA

- Gascat: I2E+, I2E, I2H, I2L, I2ELL
- ECOLABEL: B
- load input: 9,90 kW
- load output: 8,35 kW
- efficiency capacity: 84,0 %
- type of gas/pressure: G20/G25

- Gascat: I3B/P, I3+
- ECOLABEL: B
- load input: 8,60 kW
- load output: 7,40 kW
- efficiency capacity: 86,1 %
- type of gas/pressure: G30/G31

- Appliance type: C11,C31,C91
C12,C32,C42,C52,C82
- Weight: 100 kg
- Convection air inlet: min350cm² (2x $\phi 150$)
- Convection air outlet: min350cm² (2x $\phi 150$)

SPECIFICATIONS

- Only available with ceramics wood logs
- Ionization-protected pilot-flame
- Radiographic remote controle with thermostatic mode
- Inside finishing: heat-resistant black paint
- Gas/electrical connections at the left side (optional right side)

OPTIONS

- interior finishing: ORIGINAL (ribbed cast iron)
- Standard (steel)

First aid and technical support:

- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

www.metalfire.eu



EN 613

CE


General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
1/3


WITHOUT FINISHING FRAME

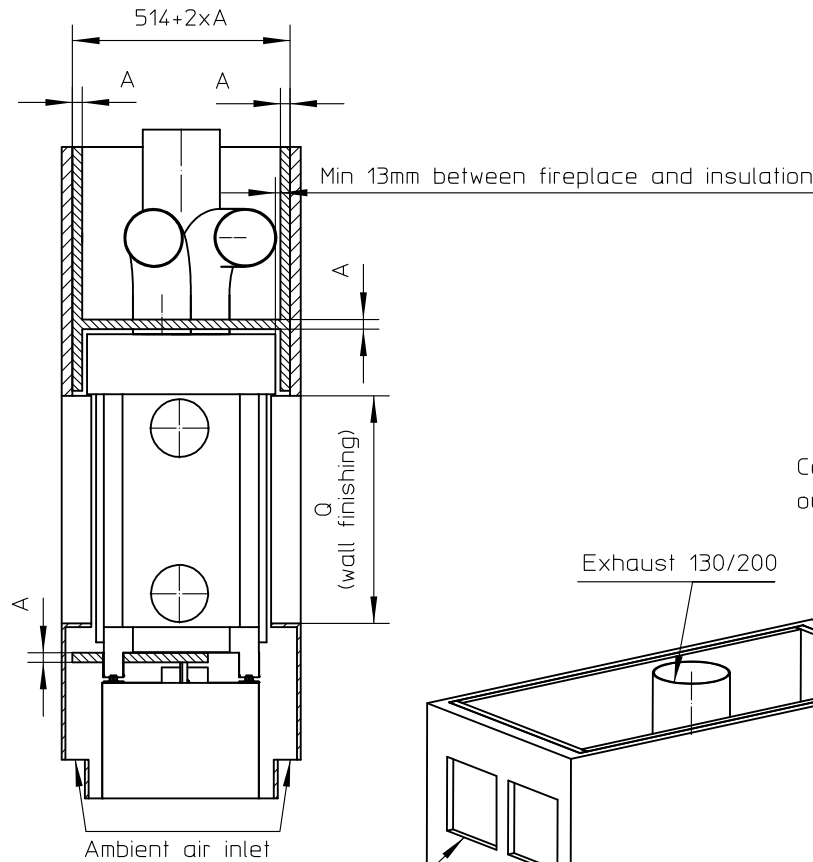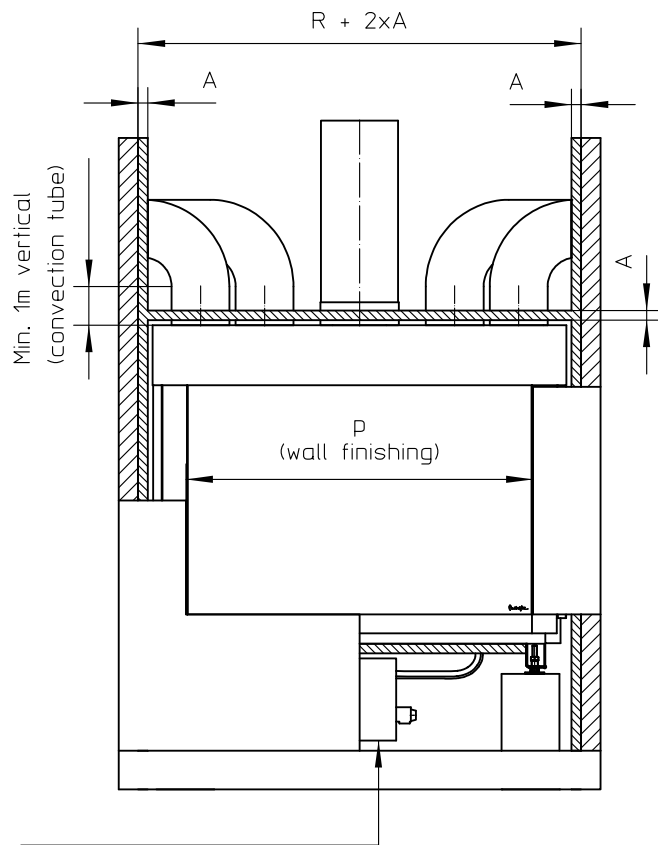

Electrical/gas controle unit
Standard connected with 1m flexible tube.
Optional: connected on right side and/or with an additional 1m tube(AT ORDER)
FORESEE ENOUGH AIR FLOW FOR COOLING

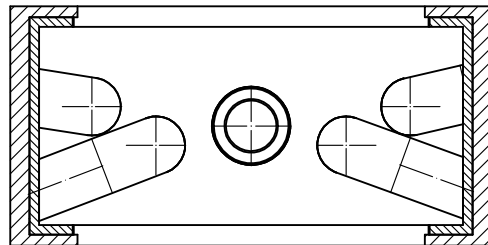

Convection air outlet

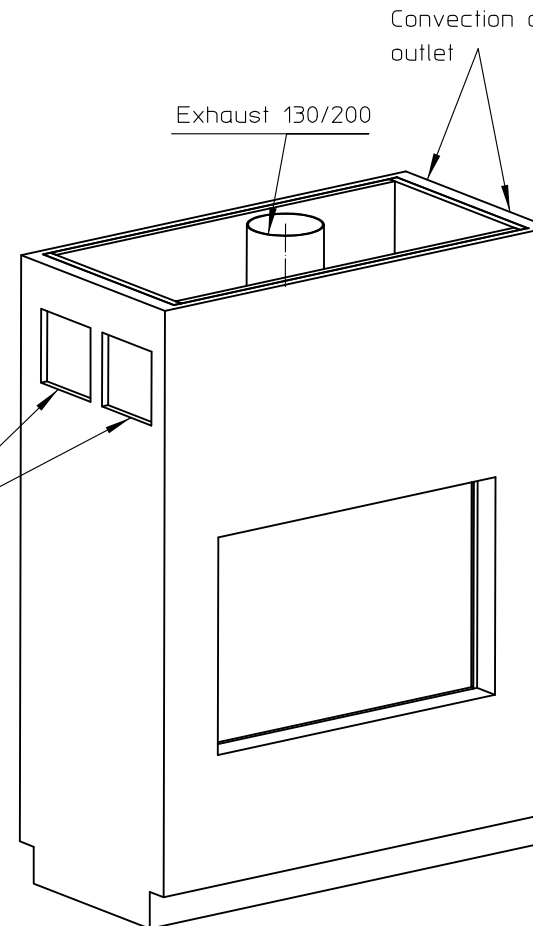

Combustable finishing material
Insulation

Insulation thickness = > see table

AVENUE Patented

metalfire

Technical Document

AVENUE MF 900-60 GHE T

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
Promasil 1100L
(TC=0,081 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g load bearing walls

A = 0mm

TC=thermot conductivity

TC=non-combustable

Table: AVENUE MF 900-60 GHE T

Installation dimensions (mm)

P	Q	R	S	T	Z
900	590	1099	926	616	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

Rev.

www.metalfire.eu

EN 613

CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
2/3

WITH FINISHING FRAME 90/10

AVENUE Patented

metalfire

Technical Document

AVENUE MF 900-60 GHE T

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
Promasil 1100L
(TC=0,081 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g load bearing walls

A = 0mm

TC=thermot conductivity

TC=non-combustable

Table: AVENUE MF 900-60 GHE T

Installation dimensions (mm)

P	Q	R	S	T	Z
900	590	1099	926	616	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

Rev.


www.metalfire.eu

EN 613

CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
3/3


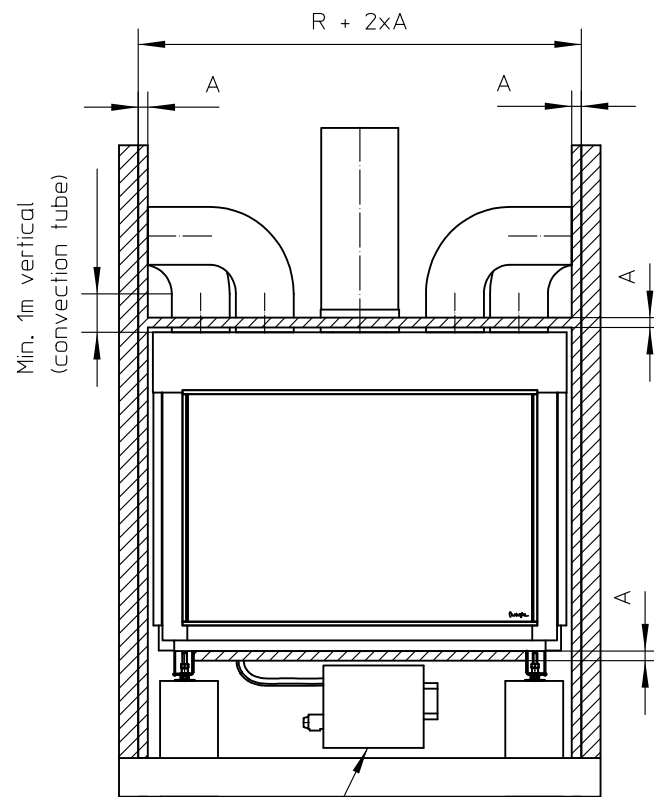


Electrical/gas controle unit

Standard connected with 1m flexible tube.

Optional: connected on right side and/or with an additional 1m tube(AT ORDER)

FORESEE ENOUGH AIR FLOW FOR COOLING

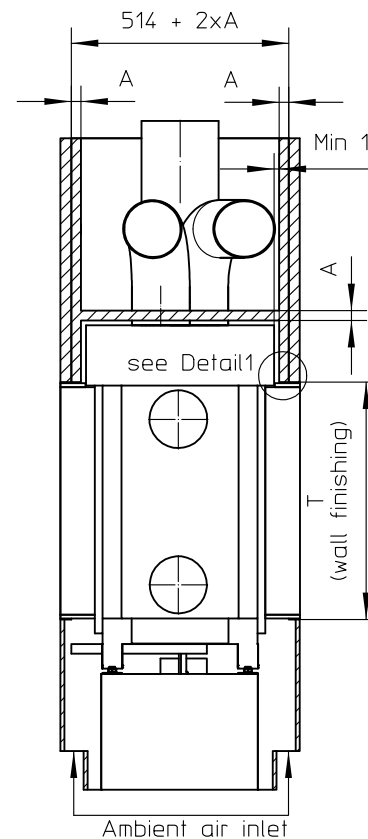


Detail1
SCALE 1:4


Convection air
outlet

Exhaust 130/200

Convection air
outlet

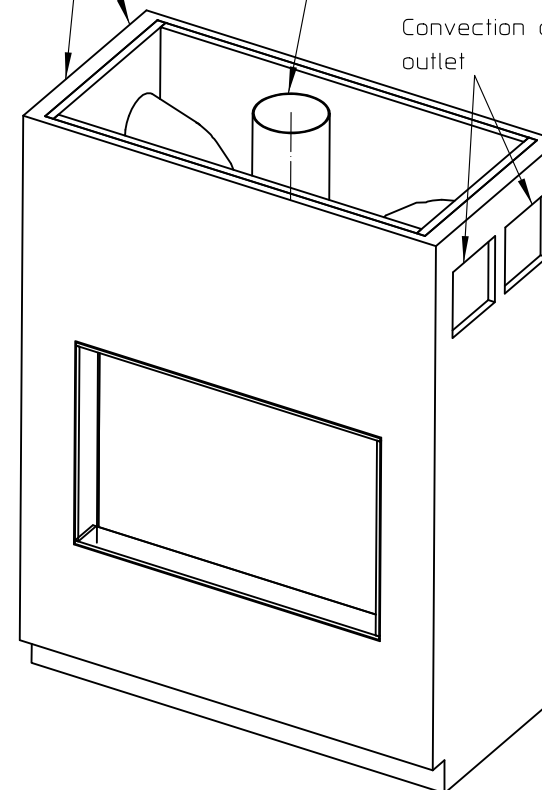

Ambient air inlet

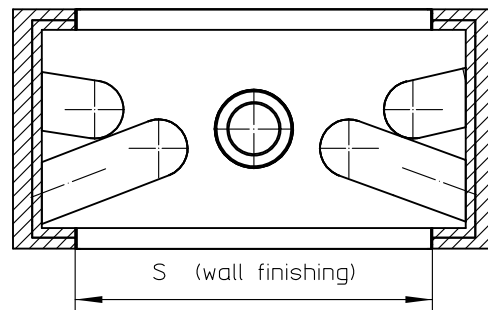

Combustable finishing material

Insulation

Insulation thickness = > see table