

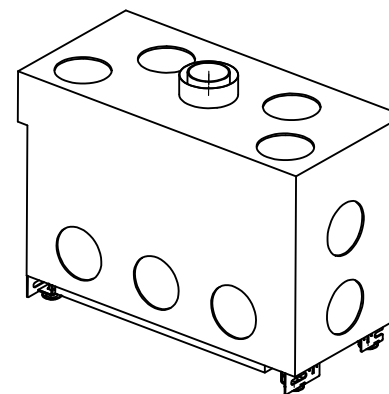
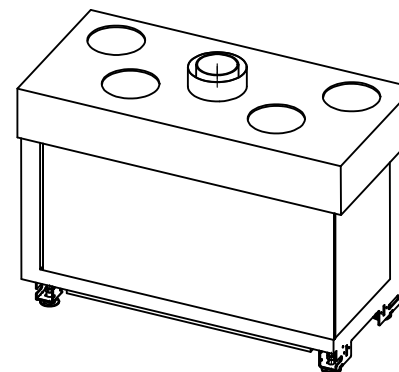
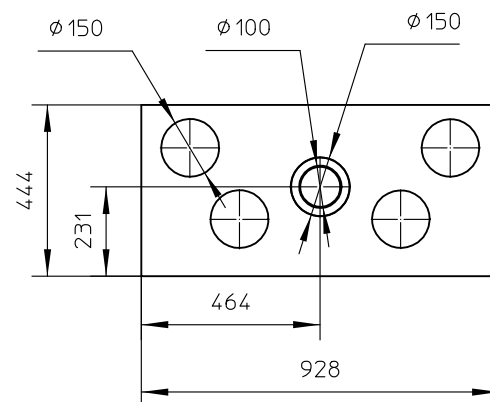
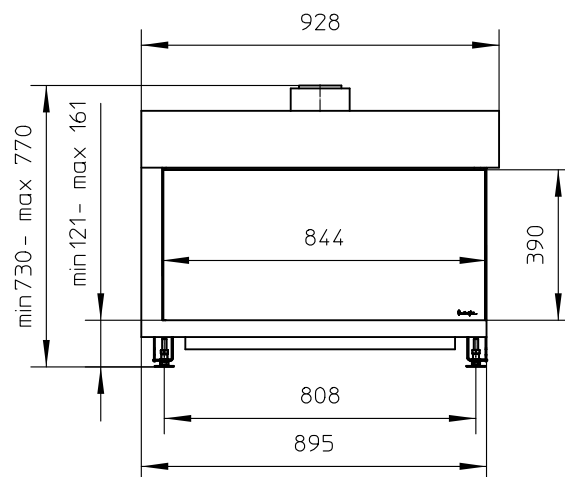


Positioning piece
for finishing
(see detail below)

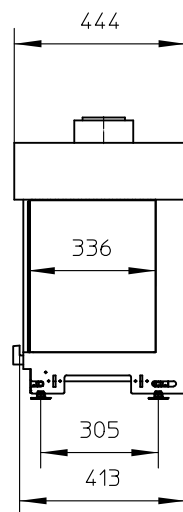

Finishing should
stop here

Finishing
level

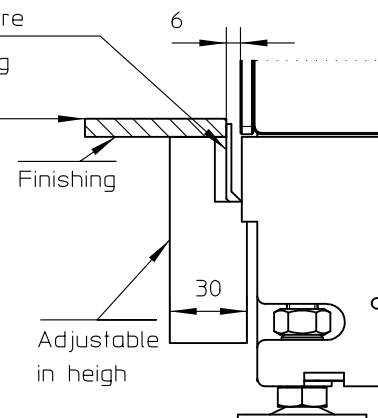

AVENUE Patented

metalfire

Technical Document

AVENUE+ MF 800-40 GHE 2SR

Dimensions (mm)

- combustion opening WxH: 841x390x331
- external WxDxH: 928x444x770
- diameter flue: $\varnothing 100/150$ or (*) $\varnothing 80/125$

TECHNICAL DATA

- Gascat: I2E+, I2E, I2H, I2L, I2ELL
 - ECOLABEL: A
 - load input: 6,00 kW
 - load output: 5,40 kW
 - efficiency capacity: 90,2 %
 - type of gas/pressure: G20/G25

- Gascat: I3B/P, I3+
 - ECOLABEL: B
 - load input: 5,50 kW
 - load output: 4,20 kW
 - efficiency capacity: 84,2 %
 - type of gas/pressure: G30/G31

- Appliance type: C11,C31,C91
C12,C32,C42,C52,C82
- Weight: 100 kg
- Convection air inlet: min350cm² (2x $\varnothing 150$)
- Convection air outlet: min350cm² (2x $\varnothing 150$)

SPECIFICATIONS

- Only available with ceramics wood logs
- Ionization-protected pilot-flame
- Radiographic remote controle with thermostatic mode
- Inside finishing: heat-resistant black paint
- Gas/electrical connections at the left side (optional right side)

OPTIONS

- interior finishing: ORIGINAL (ribbed cast iron)
- Standard (steel)

First aid and technical support:

- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20


www.metalfire.eu EN 613

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Rev.

CE

Sheet
1/3

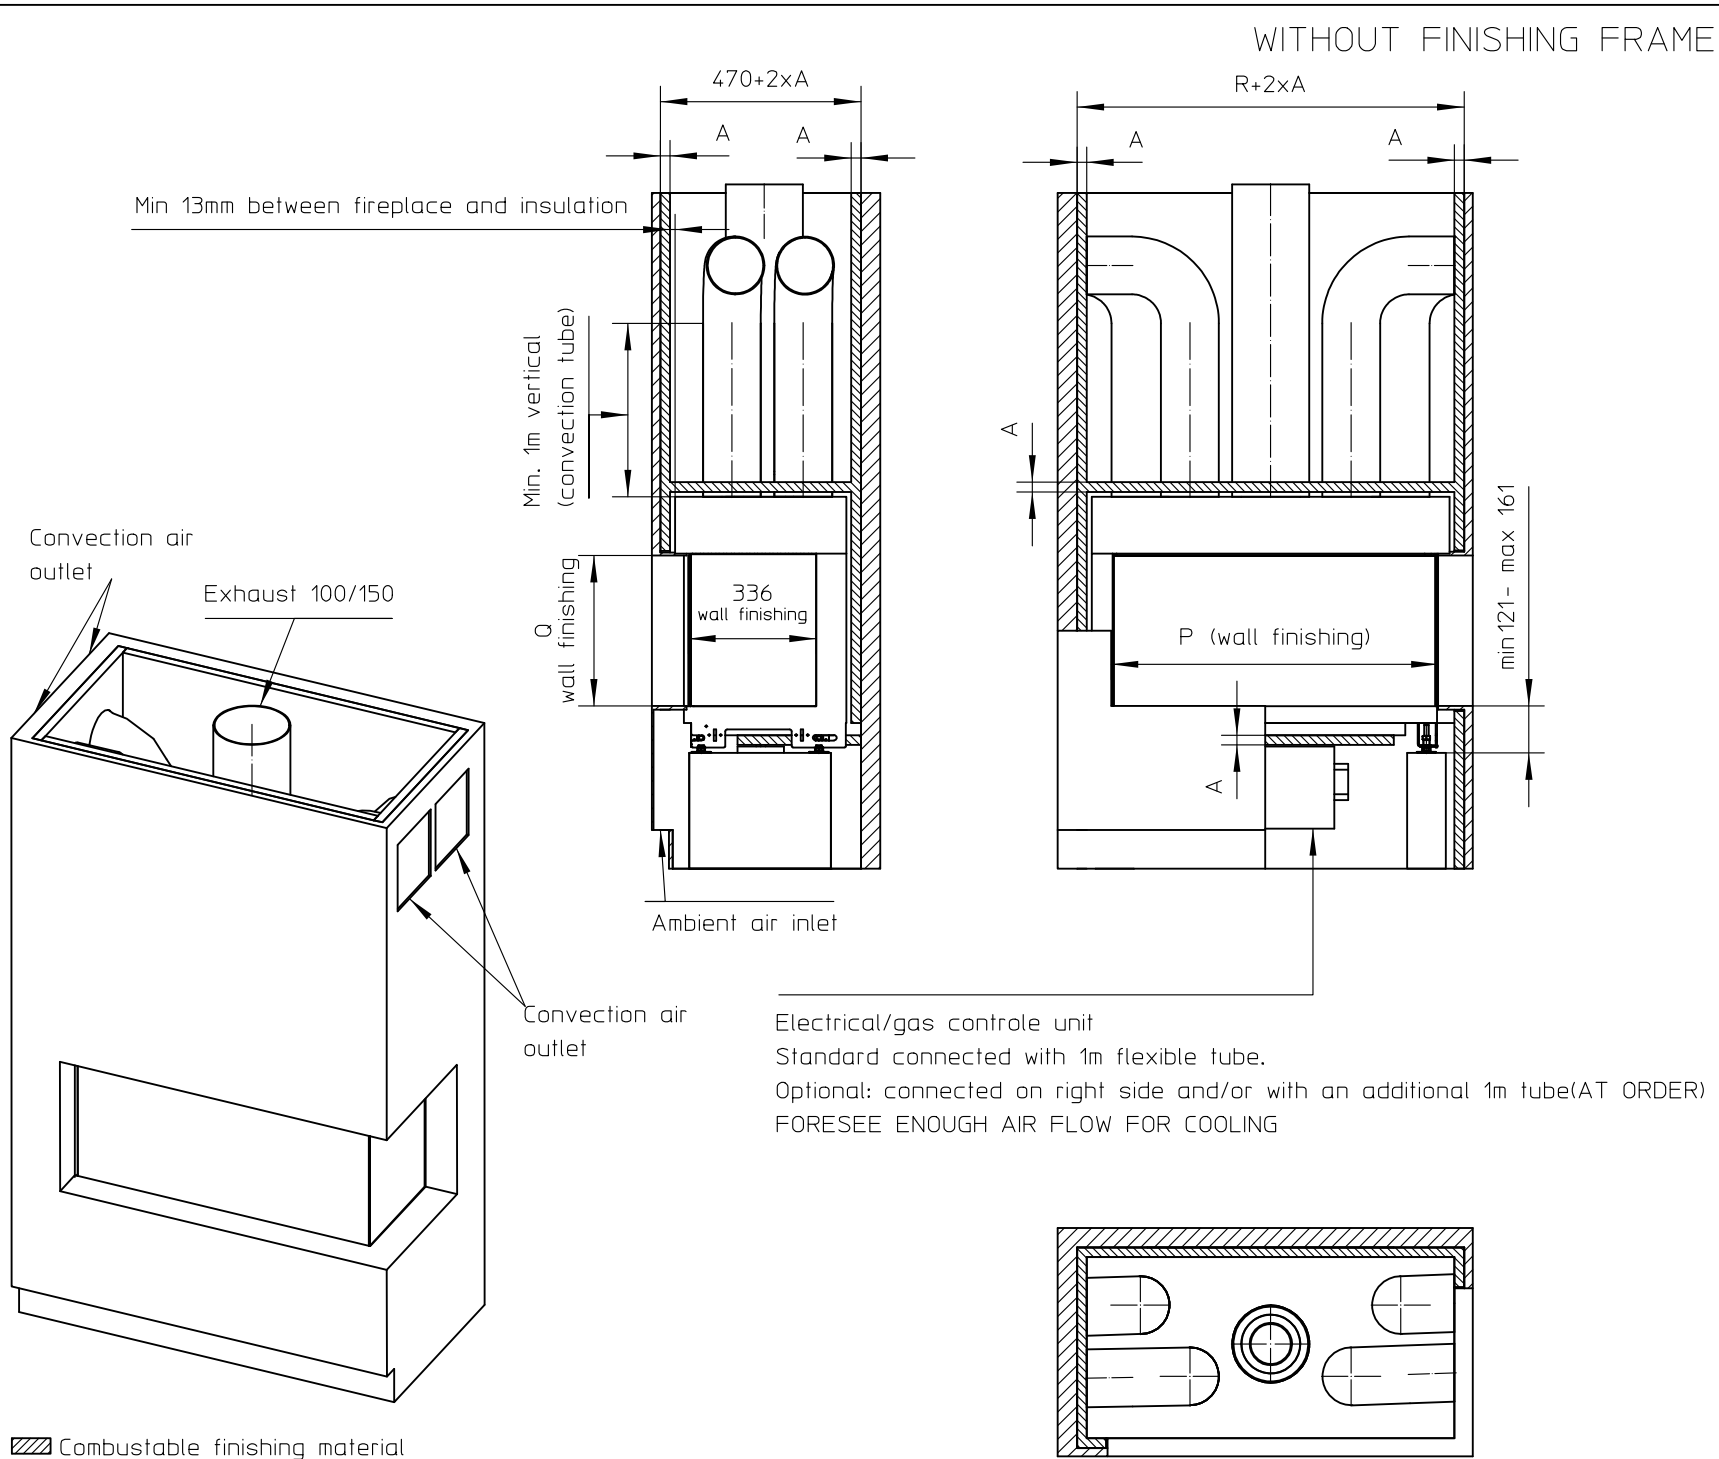

Combustable finishing material
Insulation
Insulation thickness = > see table

AVENUE						Patented
metalfire						
Technical Document						
AVENUE+ MF 800-40 GHE 2SR						
Prescribed insulation thickness (mm)						
Combustable finishing material						
Metalfire recommended Promasil 1100L (TC=0,081 W/mK)				A = 25mm		
Non-combustable finishing material						
non-combustable materials structural building items EXCLUDED e.g load bearing walls				A = 0mm		
TC=thermal conductivity				TC=non-combustable		
Table: AVENUE+ MF 800-40 GHE 2SR						
Installation dimensions (mm)						
P	Q	R	S	T	Z	
847	390	954	950	416	NA	
First aid and technical support:						
- support@metalfire.eu						
- +32 (0)9 261 50 57						
scale 1:20						Rev.
www.metalfire.eu				EN 613		CE
General dimensional tolerances up to 6mm Metalfire preserves the right to modify specifications without previous notice						Sheet 2/3

AVENUE Patented

Technical Document

Prescribed insulation thickness (mm)

Combustable finishing material

A = 25mm

Non-combustable finishing material

A = 0mm

TC=non-combustable


Installation dimensions (mm)

P	Q	R	S	T	Z
847	390	954	950	416	NA

scale 1:20

www.metalfire.eu	EN 613	CE
------------------	--------	----

General dimensional tolerances up to 6mm Metalfire preserves the right to modify specifications without previous notice	Sheet 3/3
--	--------------

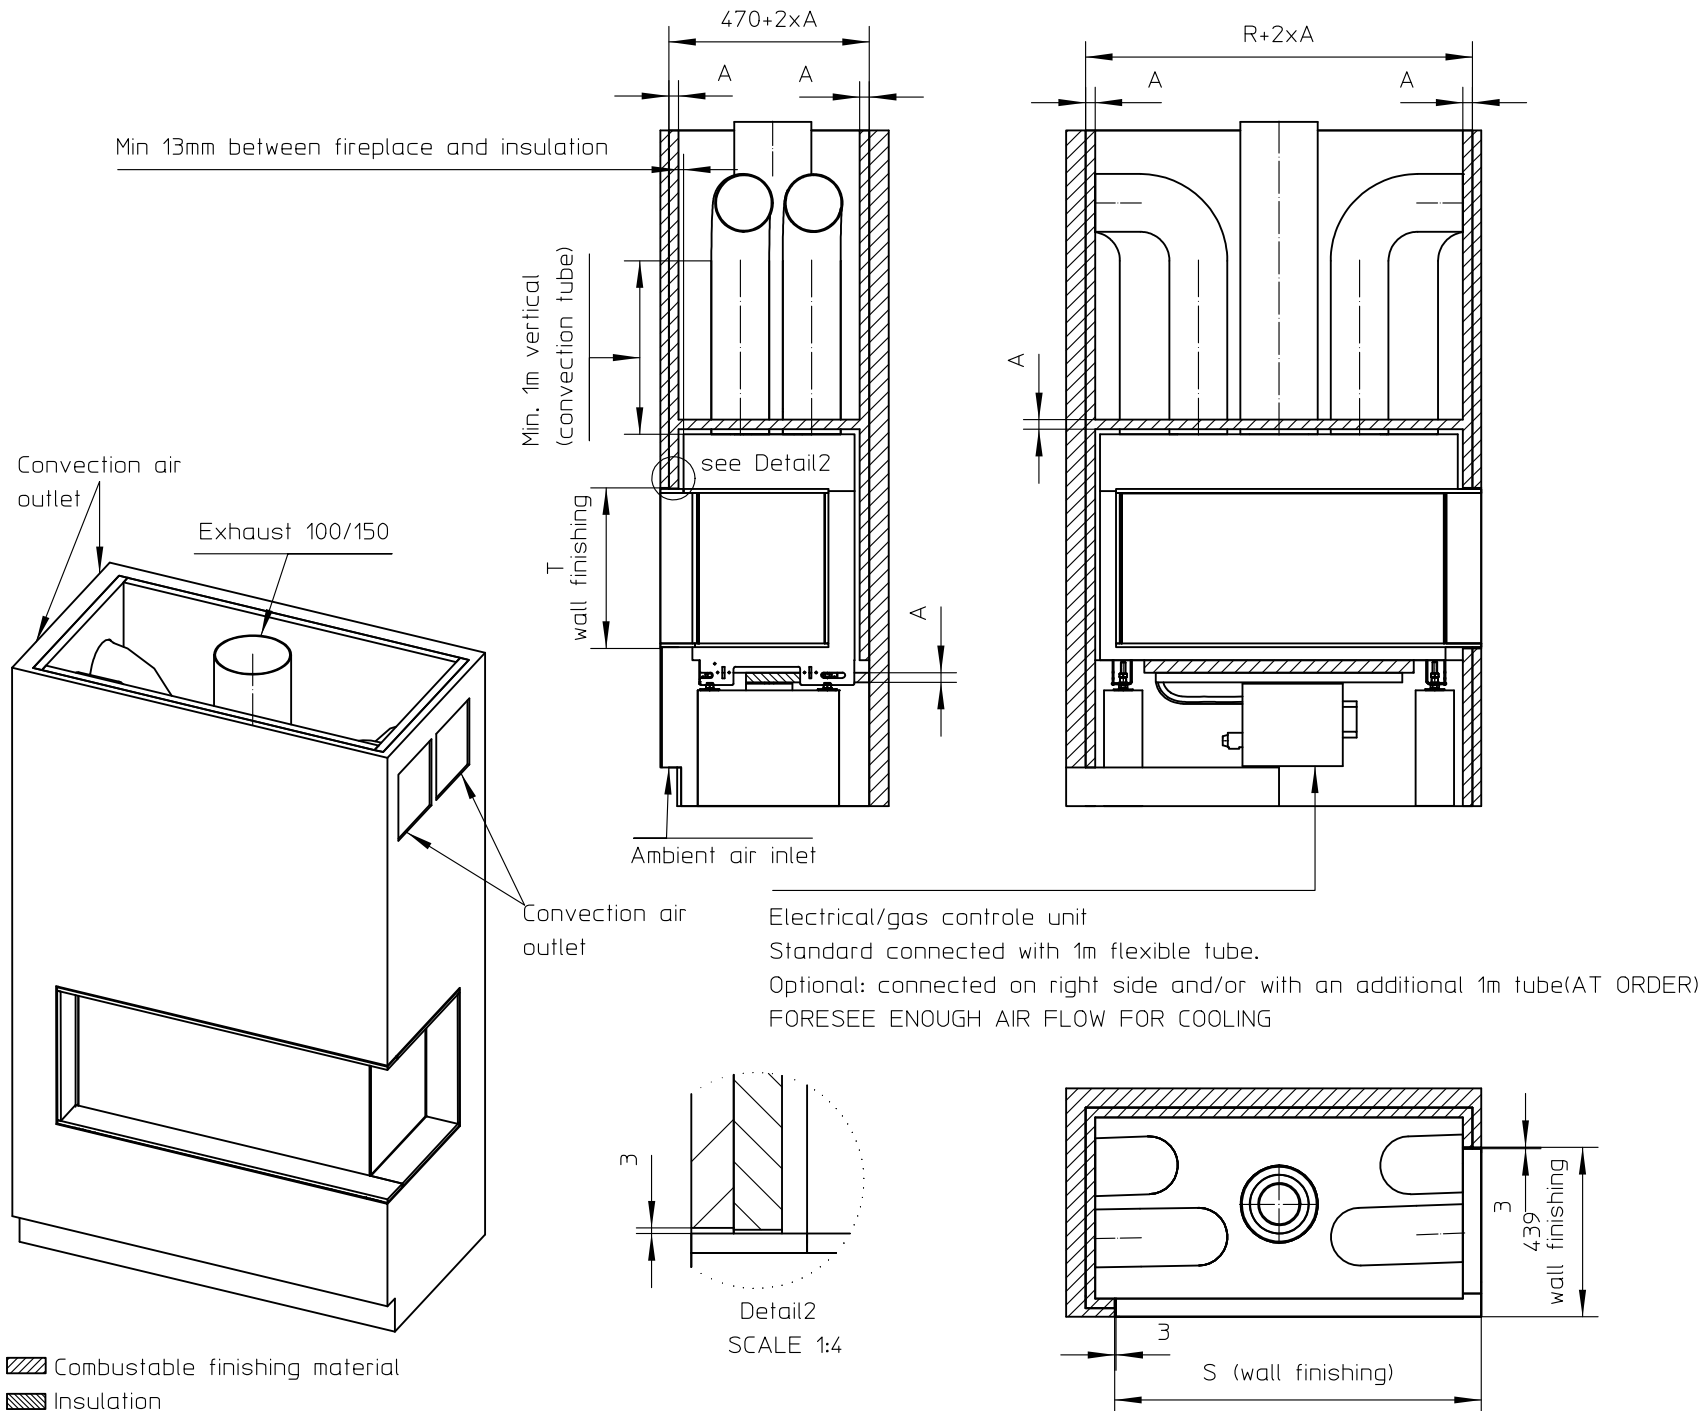 Insulation

Insulation thickness = > see table