
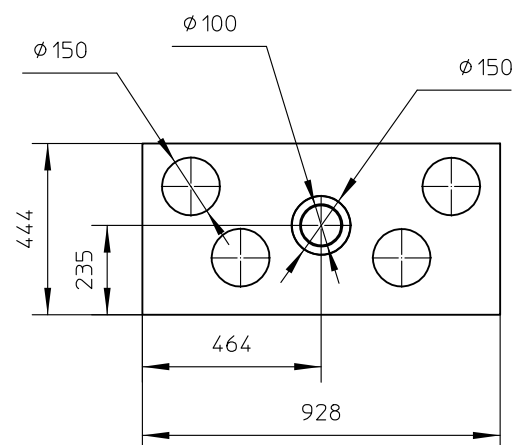
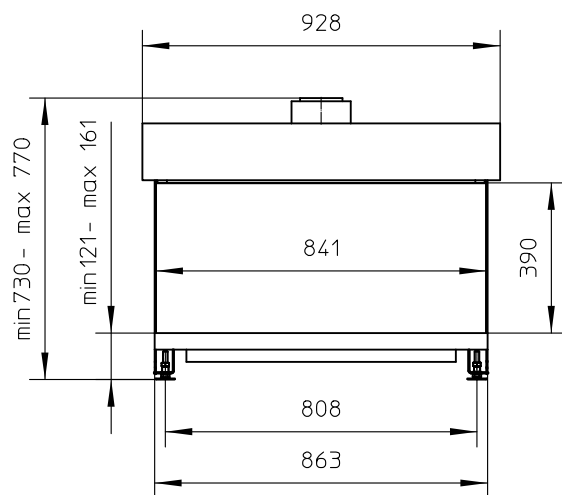
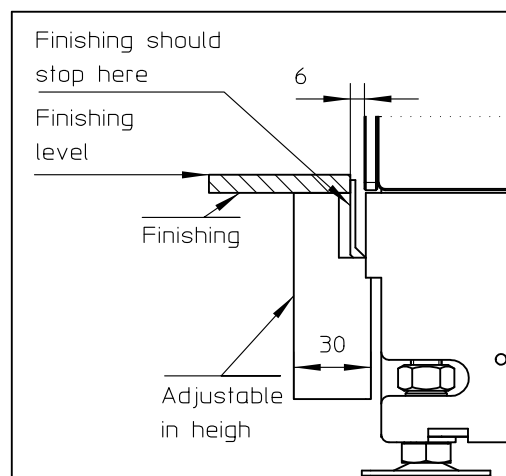
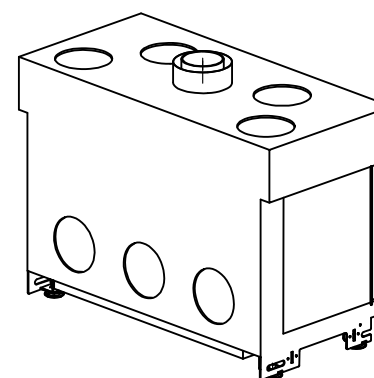


Positioning piece
for finishing
(see detail below)

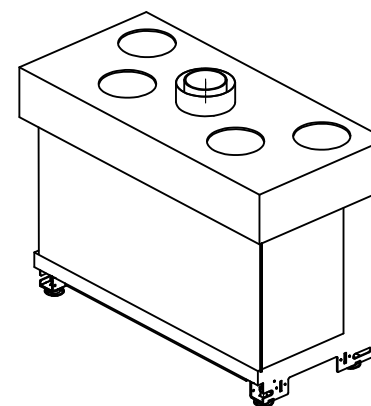

AVENUE^{Patented}

metalfire

Technical Document

AVENUE+ MF 800-40 GHE 3S

Dimensions (mm)

- combustion opening WxDxH: 841x336x390
- external WxDxH: 928x444x770
- diameter flue: Ø100/150 or
(*) Ø80/125

TECHNICAL DATA

- Gascat: I2E+, I2E, I2H, I2L, I2ELL
 - ECOLABEL: A
 - load input: 6,00 kW
 - load output: 5,40 kW
 - efficiency capacity: 90,2 %
 - type of gas/pressure: G20/G25

- Gascat: I3B/P, I3+
 - ECOLABEL: B
 - load input: 5,50 kW
 - load output: 4,20 kW
 - efficiency capacity: 84,2 %
 - type of gas/pressure: G30/G31

- Appliance type: C11,C31,C91
C12,C32,C42,C52,C82
- Weight: 100 kg
- Convection air inlet: min350cm² (2xØ150)
- Convection air outlet: min350cm² (2xØ150)

SPECIFICATIONS

- Only available with ceramics wood logs
- Ionization-protected pilot-flame
- Radiographic remote controle with thermostatic mode
- Inside finishing: heat-resistant black point
- Gas/electrical connections at the left side
(optional right side)

OPTIONS

- interior finishing: ORIGINAL (ribbed cast iron)
Standard (steel)

First aid and technical support:

- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

www.metalfire.eu




EN 613

CE


General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
1/3

WITHOUT FINISHING FRAME

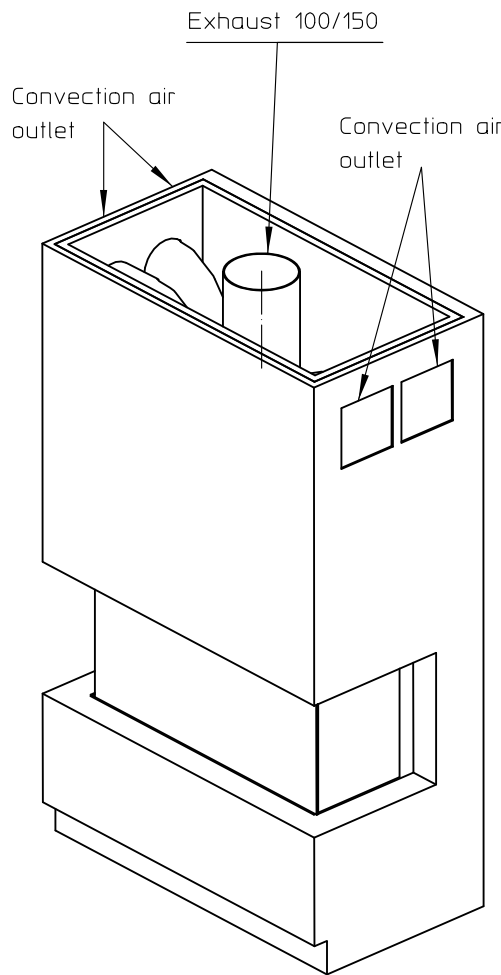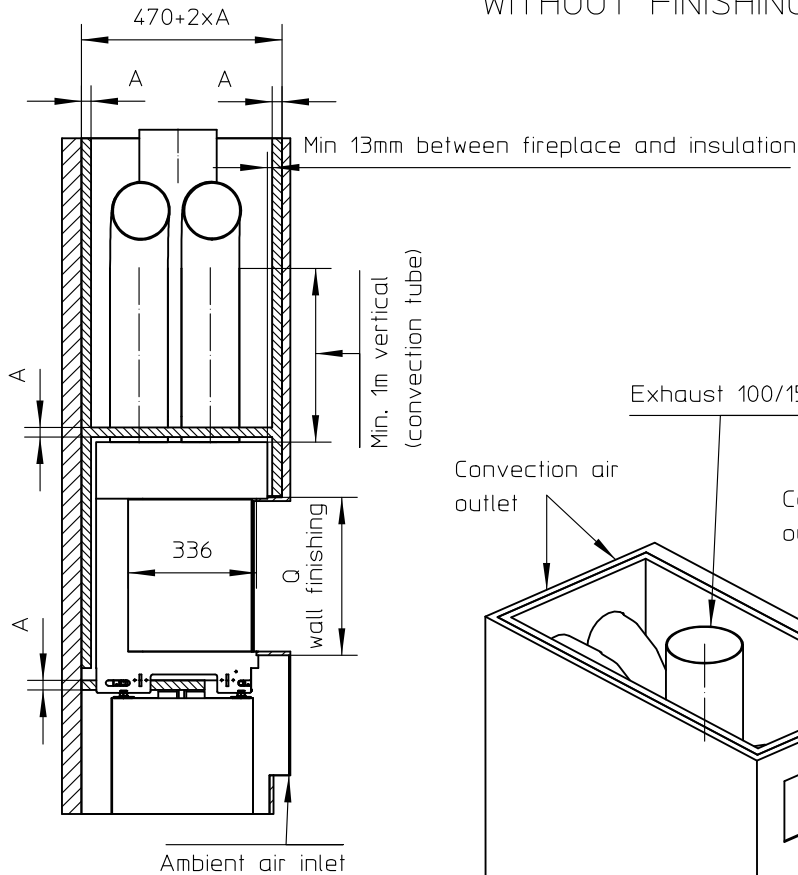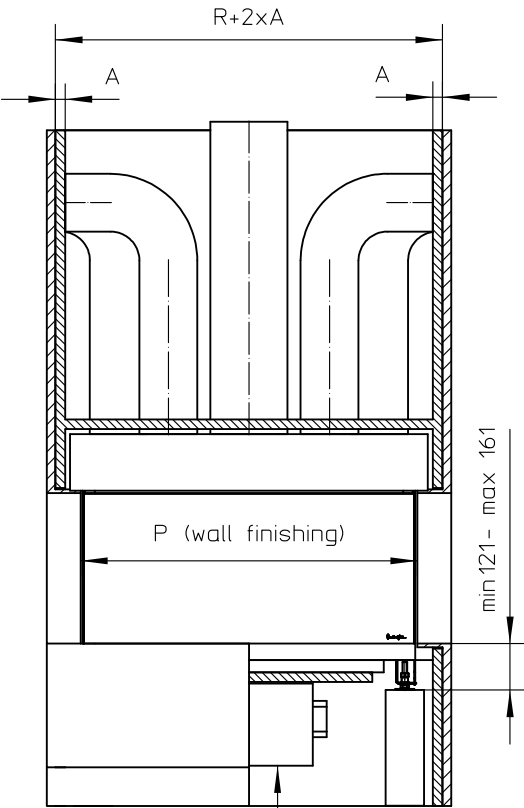

Electrical/gas controle unit
Standard connected with 1m flexible tube.
Optional: connected on right side and/or with an additional 1m tube(AT ORDER)
FORESEE ENOUGH AIR FLOW FOR COOLING

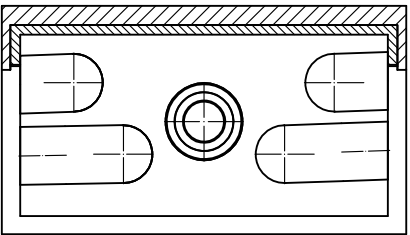

Combustable finishing material
Insulation
Insulation thickness = > see table

AVENUE_{Patented}

metalfire

Technical Document

AVENUE+ MF 800-40 GHE 3S

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended Promasil 1100L (TC=0,081 W/mK)	A = 25mm
--	----------

Non-combustable finishing material

non-combustable materials structural building items EXCLUDED e.g load bearing walls	A = 0mm
TC=thermot conductivity	TC=non-combustable

Table: AVENUE+ MF 800-40 GHE 3S

Installation dimensions (mm)

P	Q	R	S	T	Z
841	390	954	950	416	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20	Rev.
www.metalfire.eu	EN 613
General dimensional tolerances up to 6mm Metalfire preserves the right to modify specifications without previous notice	CE
	Sheet 2/3

WITH FINISHING FRAME 90/10

AVENUE_{Patented}
metalfire

Technical Document

AVENUE+ MF 800-40 GHE 3S

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
Promasil 1100L
(TC=0,081 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g load bearing walls

A = 0mm

TC=thermot conductivity

TC=non-combustable

Table: AVENUE+ MF 800-40 GHE 3S

Installation dimensions (mm)

P	Q	R	S	T	Z
869	390	954	1049	416	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

Rev.




www.metalfire.eu

EN 613

CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
3/3

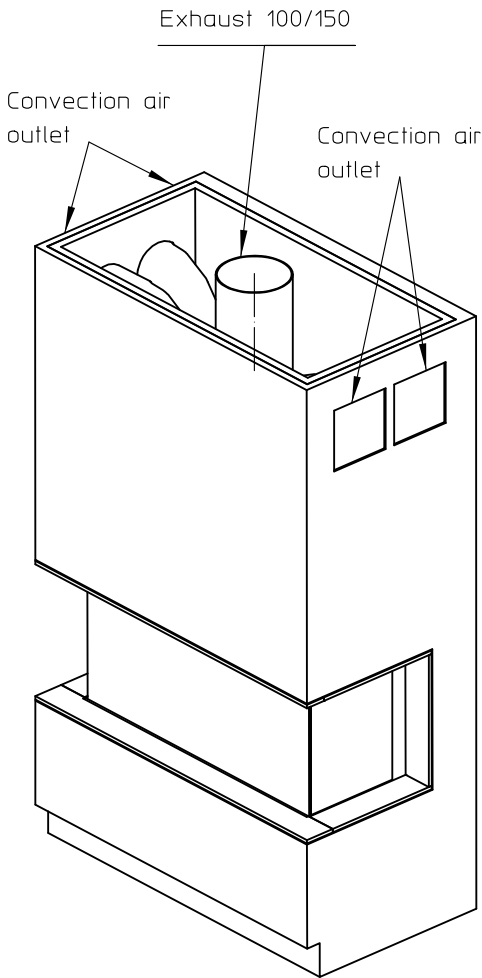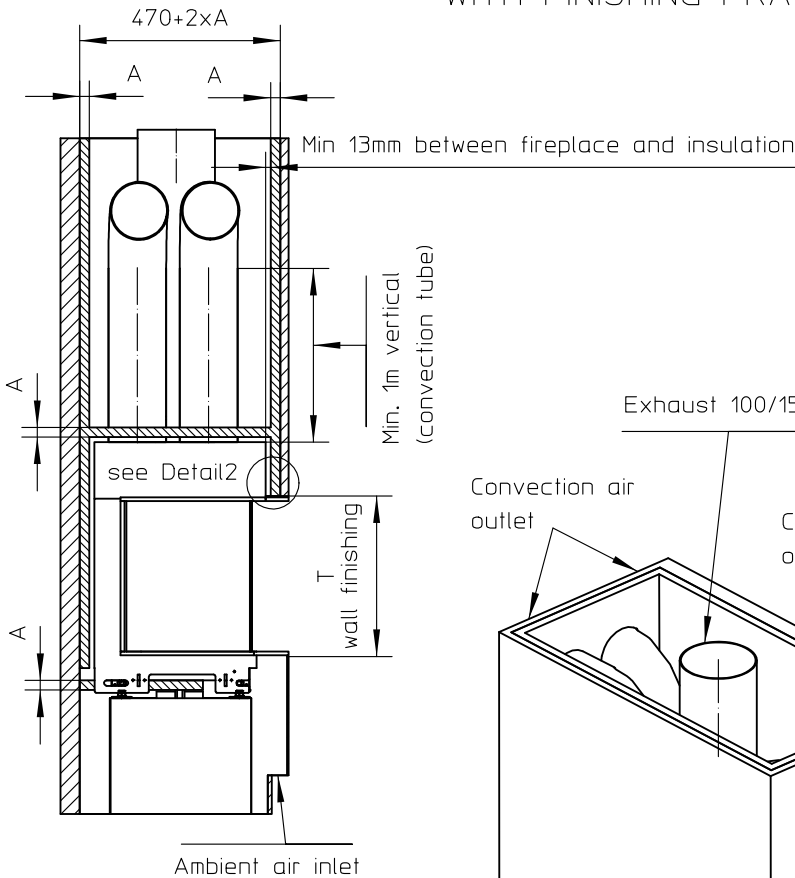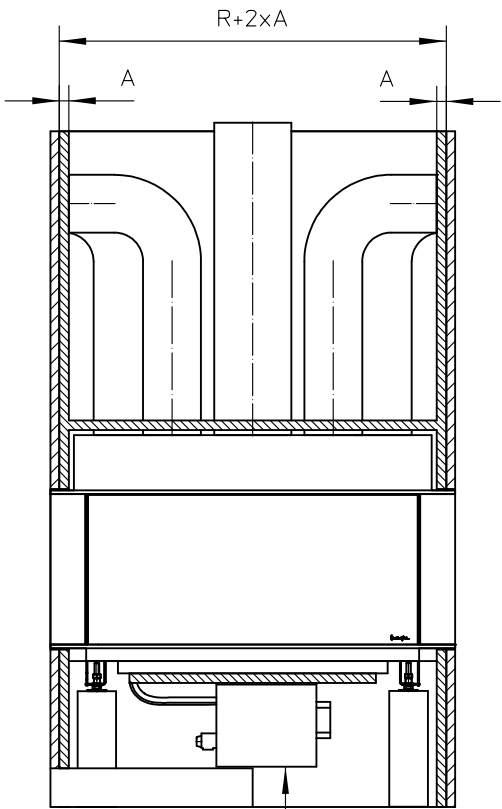

Combustable finishing material

Insulation

Insulation thickness = > see table

Electrical/gas controle unit
Standard connected with 1m flexible tube.
Optional: connected on right side and/or with an additional 1m tube(AT ORDER)
FORESEE ENOUGH AIR FLOW FOR COOLING

