


# CLOU XTRA BACK

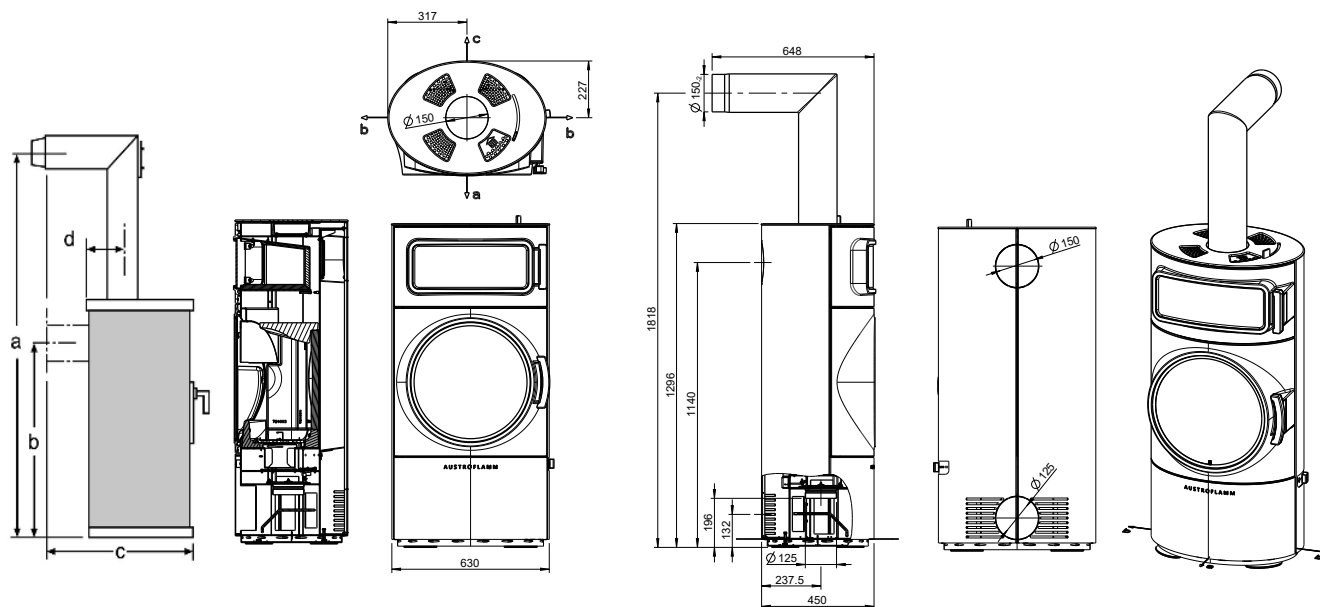

## DIMENSIONS AND WEIGHTS

|                                                                    |                         |
|--------------------------------------------------------------------|-------------------------|
| Steel case (STM) h x w x d [mm]                                    | 1296 x 630 x 450        |
| Ceramic case (KMG) h x w x d [mm]                                  | -                       |
| Soapstone case (SPM) h x w x d [mm]                                | -                       |
| Firebox h x w x d [mm]                                             | 389 x 432 x 245         |
| Baking compartment h x w x d [mm]                                  | 175 x 445 x 255         |
| Weight STM / KMG / SPM [kg]                                        | 324 / - / -             |
| Weight Xtra [kg]                                                   | 111                     |
| Flue pipe outlet [Ø mm]                                            | 150                     |
| Flue pipe connection, middle [mm]                                  | 1144                    |
| Dimensions a, b, c, d [mm]                                         | 1813 / 1144 / 598 / 227 |
| Safety distances to combustible materials front / side / rear [mm] | under examination       |

## OUTPUT

|                                                                   |        |
|-------------------------------------------------------------------|--------|
| Nominal heat output as per EN 13240 [kW]                          | 8      |
| Heat output min. / max. [kW]                                      | 4 / 11 |
| Room heating capacity (depending on the building insulation) [m³] | 98-255 |
| Energy efficiency category                                        | A      |

## FITTINGS

|                                                   |                |
|---------------------------------------------------|----------------|
| XTRA heat storage technology                      | o              |
| Heat Memory System (HMS)                          | -              |
| Ash box                                           | o              |
| external air connection / balanced flue operation | rear or bottom |

## DATA FOR THE CHIMNEY SWEEP

|                                                              |                   |
|--------------------------------------------------------------|-------------------|
| Flue gas mass flow closed [g/s]                              | under examination |
| Flue gas temperature closed [°C]                             |                   |
| Minimum delivery pressure at nominal heat output closed [Pa] |                   |
| at 0.8 times nominal heat output [Pa]                        |                   |