


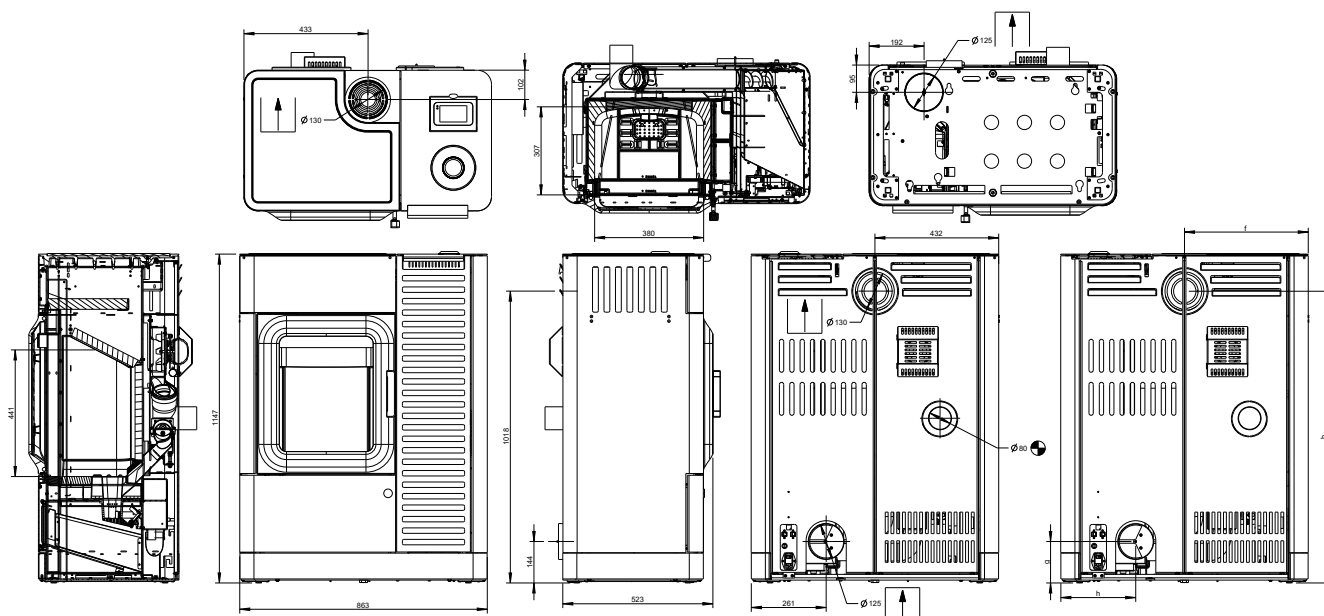

DIMENSIONS AND WEIGHTS

Height / Width / Depth [mm]	1147 / 863 / 523
Flue pipe outlet, diameter [mm]	130
Outside air connection [Ø mm]	125
Weight [kg]	283,5
b: Connection height with flue pipe rear [mm]	1018
f: Flue pipe connection from right [mm]	432
g: Connection height, outside air [mm]	144
h: Outside air connection from left [mm]	261
Firebox h x w x d [mm]	441 x 380 x 307

OUTPUT

Nominal heat efficiency [kW] as per EN 13240	9.4
Min. / max. heat output [kW]	2.4-9.4
Min. / max. space heating capacity [m³]	98-255
Pellet hopper [kg/l]	≈ 34/51
Min. / max. fuel consumption [kg/h]	0.6-1.87
Min. / max. burning time [h]	≈ 18- 56
Power connection [V/Hz]	230/50

FITTINGS

Room temperature sensor	o
(Weekly) timer	o
Automatic grate	o
Balanced flue	o
WLAN	Z
Remote control	Z
Air distribution module	Z

DATA FOR THE CHIMNEY SWEEP

Flue gas mass flow [g/s]	under examination
Flue gas temperature [°C]	
Minimum delivery pressure at nominal heat output [Pa]	
Minimum feed pressure for chimney calculation	
Safety distances a, b, c [mm]	