

FIREPLACE INSERTS FROM BRUNNER






BKH Tunnel 50-98 green

State: 2024-10-30






BRUNNER®

Dimension sheets - BKH Tunnel 50-98 green

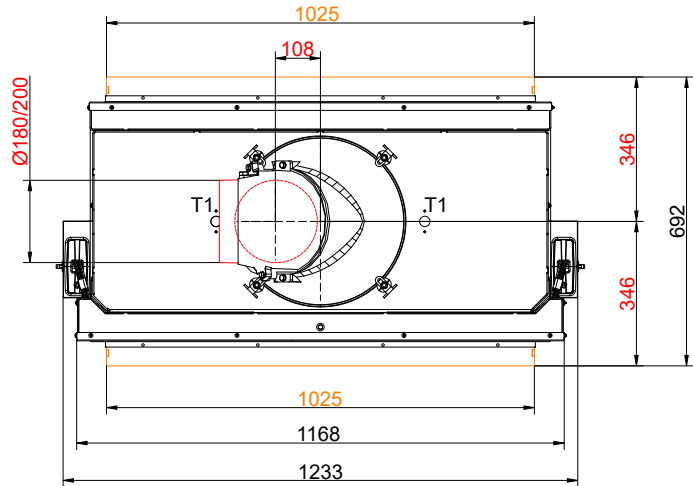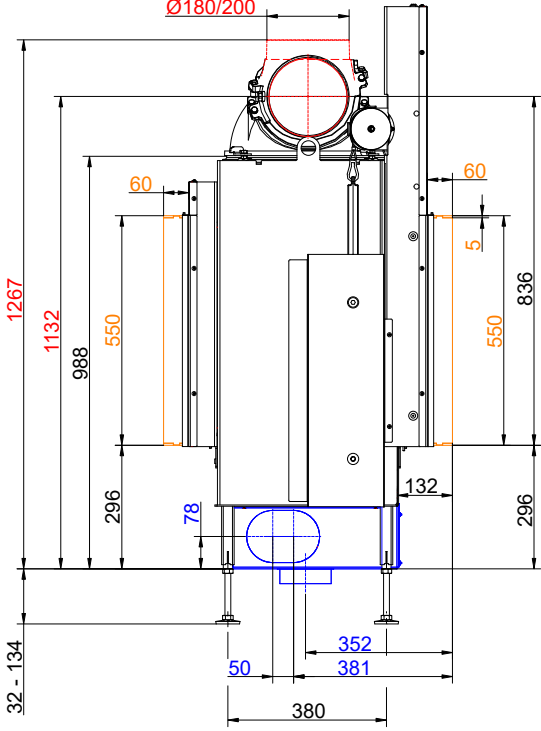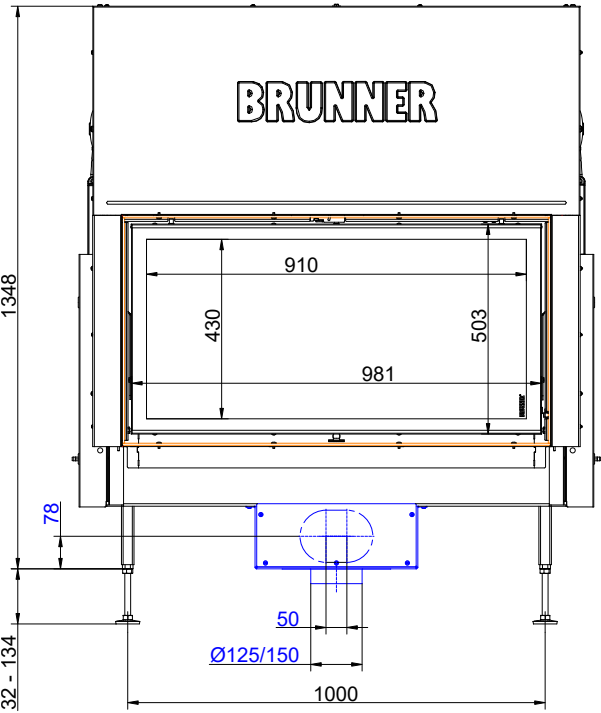




... lifting door/tilting door with mounting frame and cast iron dome

Dimension sheets - BKH Tunnel 50-98 green

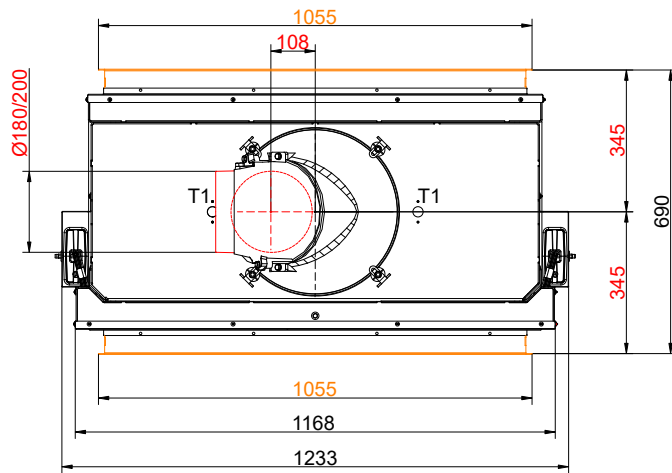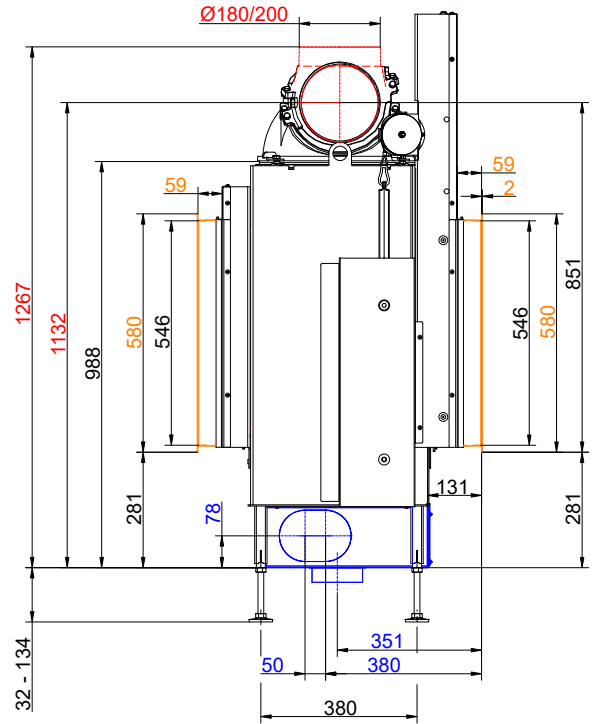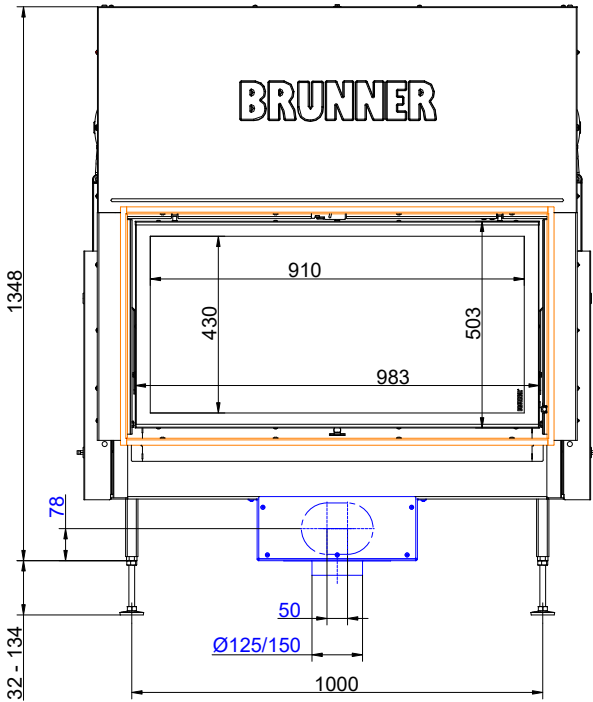

... lifting door/tilting door with door frame and cast iron dome

Dimension sheets - BKH Tunnel 50-98 green

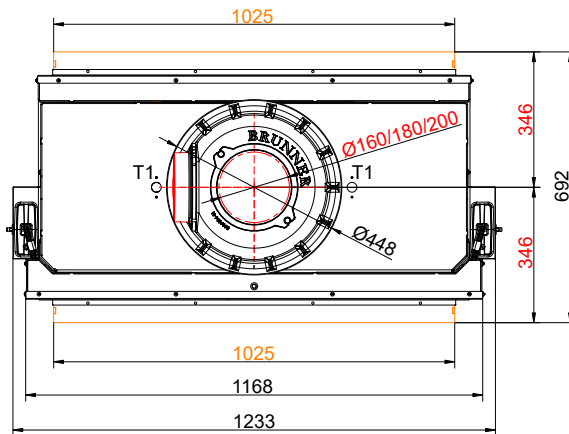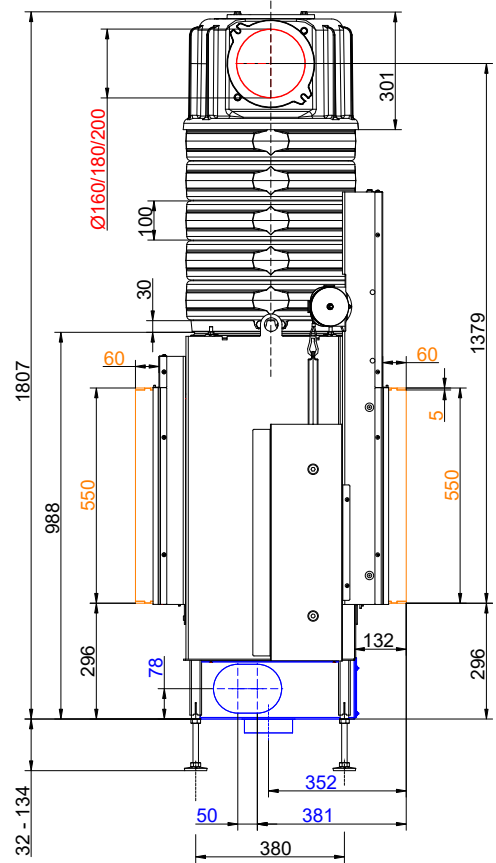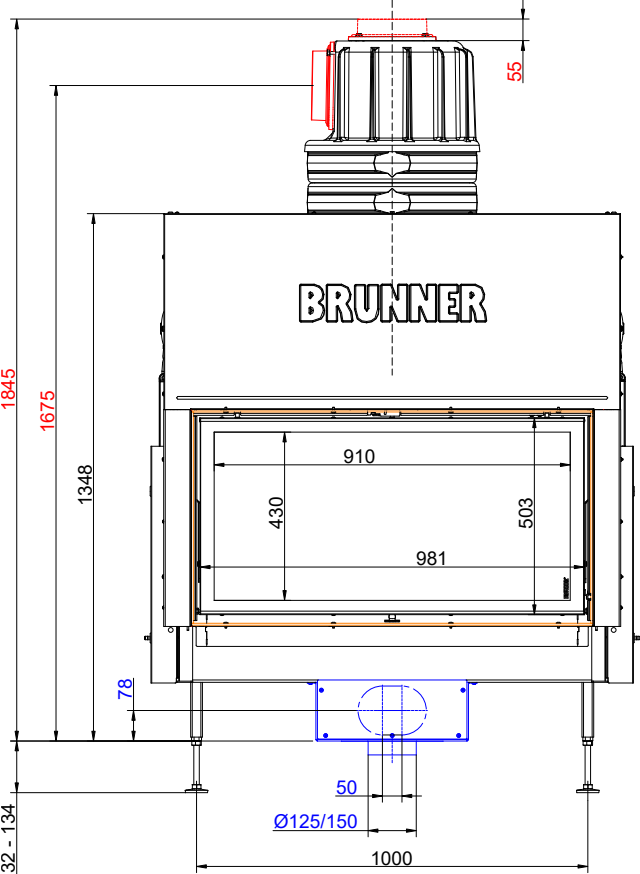

... lifting door/tilting door with mounting frame and MAS

Technical drawing of the Brunner 1000L refrigerator showing dimensions in millimeters (mm). The drawing includes a top view and a side view.

Top View Dimensions:


- Overall width: 1000 mm
- Overall height: 1845 mm
- Internal width: 910 mm
- Internal height: 503 mm
- Internal width (excluding door): 983 mm
- Internal height (excluding door): 430 mm
- Door thickness: 55 mm
- Door handle height: 78 mm
- Door hinge offset: 50 mm
- Door hinge offset (alternative): 32 - 134 mm

Side View Dimensions:

- Overall height: 1675 mm
- Internal height: 1348 mm




Other Details:

- The brand name "BRUNNER" is prominently displayed on the front panel.
- The door is shown with a handle and a hinge mechanism.
- The bottom of the unit features a base with a central circular cutout and four mounting points.

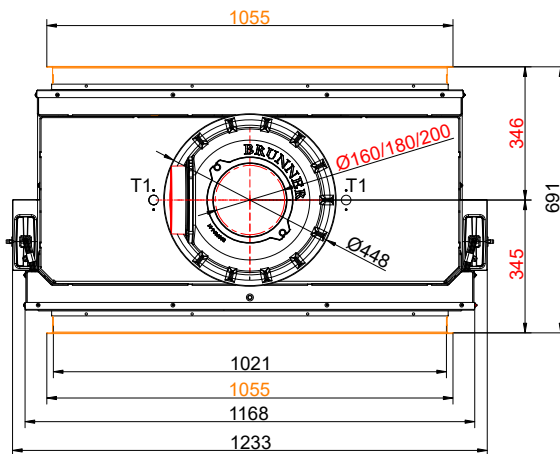




State: 2024-10-30

Dimension sheets - BKH Tunnel 50-98 green

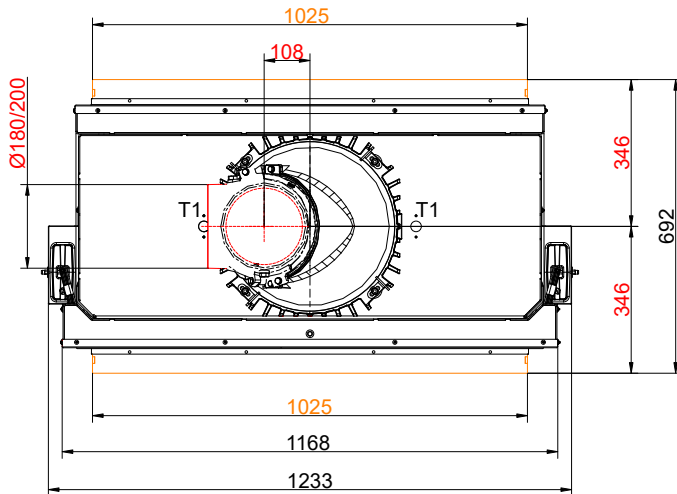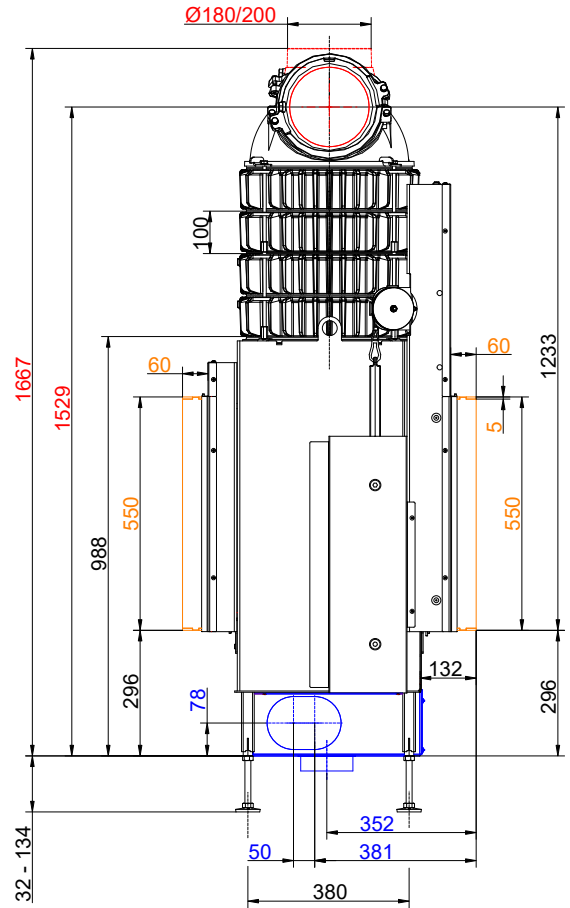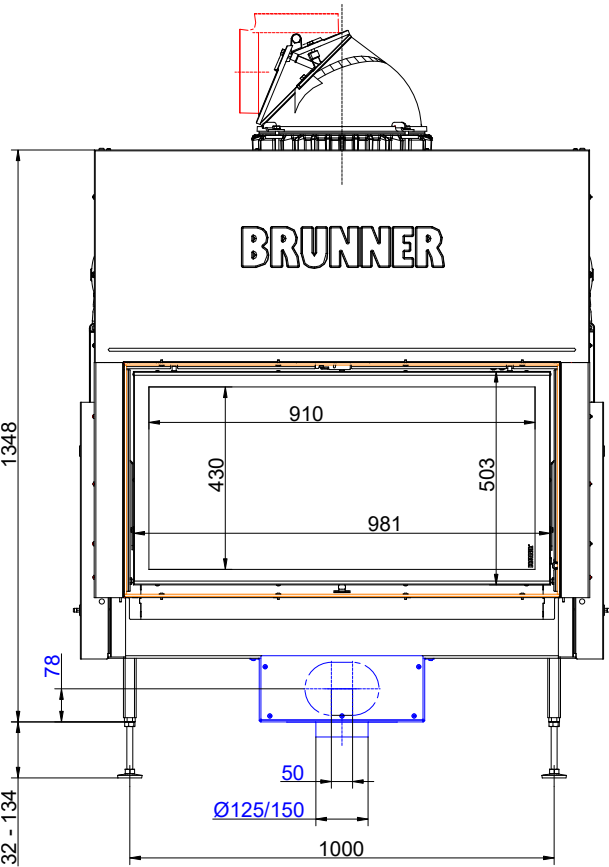




... lifting door/tilting door with mounting frame and cast iron heat exchanger rings + dome

Dimension sheets - BKH Tunnel 50-98 green

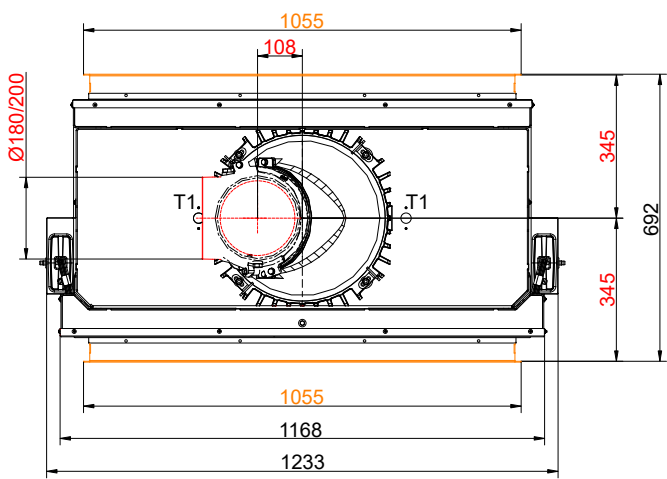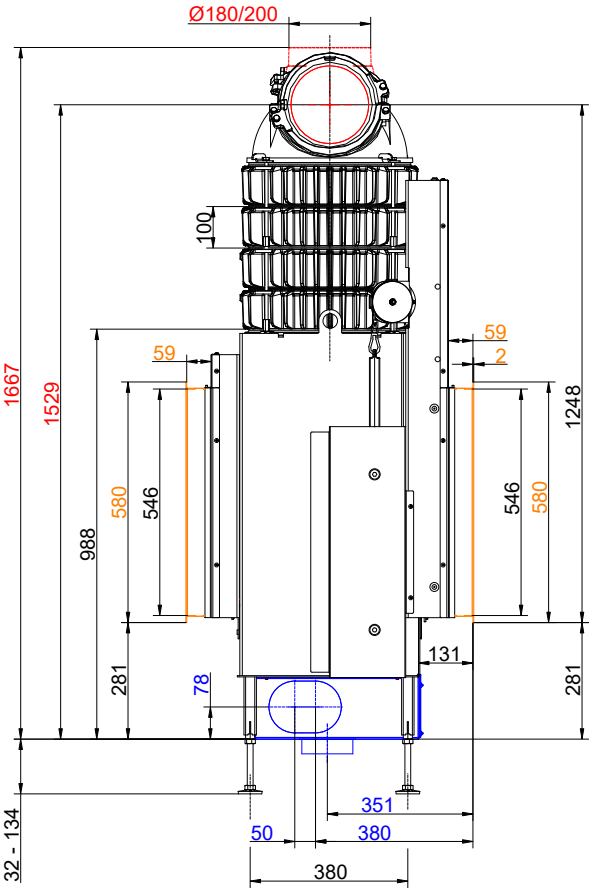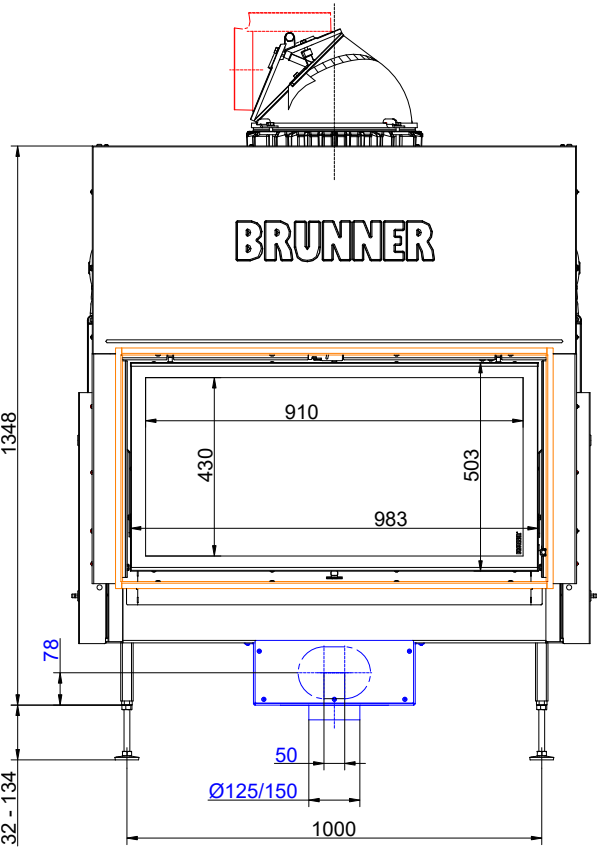

... lifting door/tilting door with door frame and cast iron heat exchanger rings + dome

Dimension sheets - BKH Tunnel 50-98 green

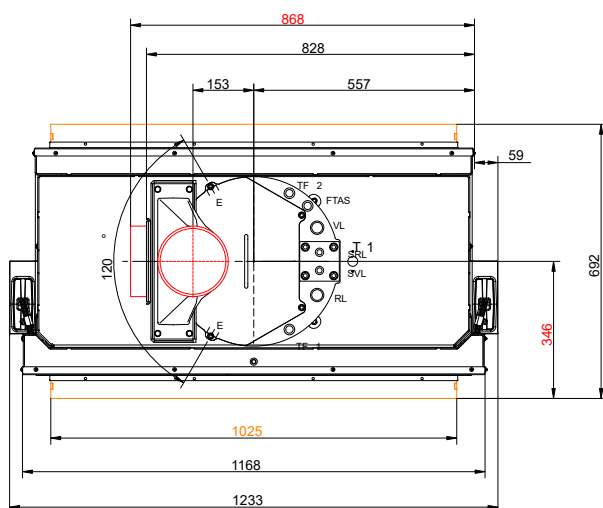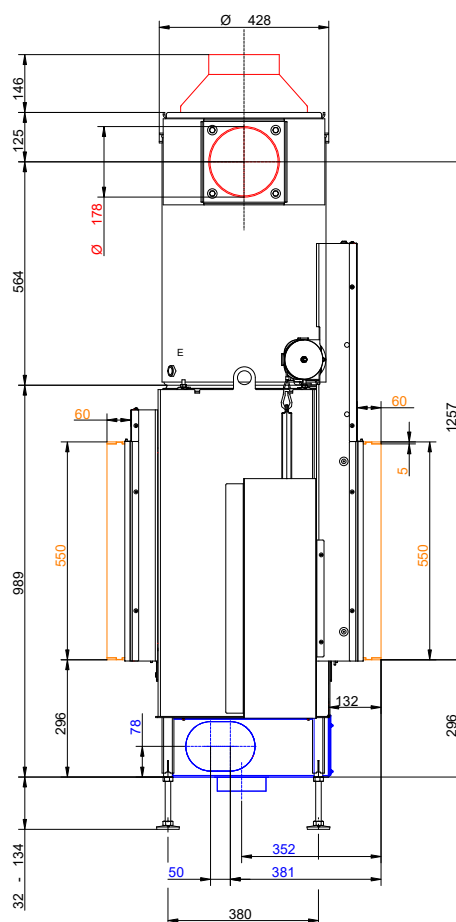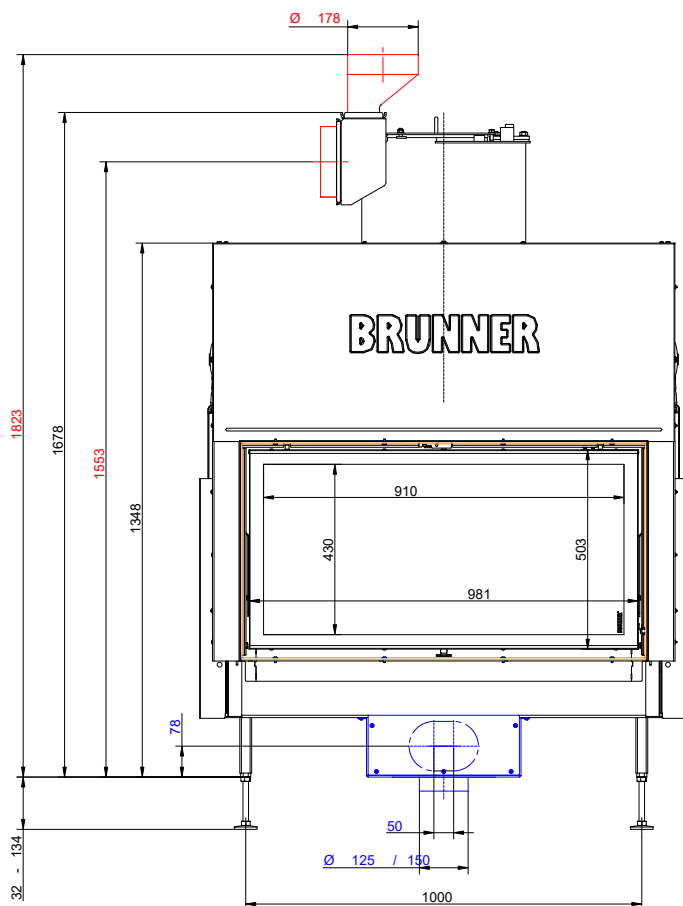

- VL supply 1"ext. th.
- RL return boiler 1"ext.th.
- E drain 1/2"int. th.
- SVL supply cooling pipe outlet ext.th.
- SRL return cooling pipe outlet 1/2"ext.th.
- FTAS socket for thermal safety sensor int.th.
- TF socket 1/2" for sensor int.th.

BKH Tunnel 50-98 ... with mounting frame and Boiler module

We suggest for CAD planning Palette CAD. Permanent updated drawings: www.brunner.de

Frames/ flue gas outlet connection/ combustion air supply connection/ front variants/ support bearing are marked in color.

Planning and installation - BKH Tunnel 50-98 green

Tested according to		EN 13229 W	EN 13229 WA
Values measured at		Rated power ¹⁾	Storage operation ²⁾
Data for functional demonstration			
Rated heat power	kW	11	-
Fire wood volume	kg/h	3.3	4.5
Combustion performance	kW	13.0	22
Flue gas mass flow	g/s	9.8	19
Flue gas temperature after:			
Cast iron dome	°C	250	350
4 x cast iron heat exchanger rings + dome	°C	220	260
5 x accumulation rings incl. MAS casted cover ³⁾	°C	-	260
2,0 m ceramic accumulator ⁴⁾	°C	-	180
1,4 m accumulation stones (MSS) ⁴⁾	°C	-	180
Boiler module	°C	208	-
Necessary supply pressure	Pa	12	12
Fuel amount	kg	2.5	5.0
Combustion air consumption	m³/h	32	48
Combustion air connection Ø	mm	125	125
Heat distribution			
Insert / reheating surface	%	20 / 30	20 / 30
glass ceramic / glass ceramic coated (GKB)	%	50 / 40	50 / 40
Cross-section of gratings ⁵⁾			
exhaust warm air	cm²	800	800
Recirculation air	cm²	800	800
Minimal oven surface for closed construction type			
Heat dissipating surface	m²	5.5	5.5
Minimal distances of the fireplace			
Heat protection panel for cladding, insulation layer	cm	-	-
to cladding, insulation layer	cm	5	5
to the floor (non-combustible)	cm	3	3
Minimum insulation thicknesses of substitute insulation material / reference insulation material + facing wall ⁶⁾			
with heat protection panel for mounting wall (non-combustible) ⁷⁾	cm	6 / 8	6 / 8
with heat protection panel for mounting wall (combustible) ⁷⁾	cm	12 / 13 + 10	12 / 13 + 10
to mounting wall (non-combustible)	cm	8 / 10	8 / 10
to mounting wall (combustible)	cm	18 / 20 + 10	18 / 20 + 10
to the ceiling (non-combustible)	cm	8 / 10	8 / 10
to the ceiling (combustible)	cm	22 / 25 + 10	22 / 25 + 10
to the floor (non-combustible)	cm	0 / 0	0 / 0
Minimum distances in front of the combustion chamber, glass ceramic / glass ceramic coated (GKB)			
for combustible parts	cm	≥ 120 / ≥ 80	≥ 120 / ≥ 80
Weight			
Fireplace insert + combustion chamber inner lining chamotte/cast iron	kg	225,5 + 76,5 / 86,5	
Meets requirement/limit values for:			
EU / Germany		Ecodesign / 1. BImSchV (Stufe 2)	

1) Indications to "Rated power" determined with 4 heat exchanger rings made of cast iron and Ø200 dome.

2) Indications to "Storage operation" for the manual execution of the reheating surface (guide values).

3) Damper flap recommended

4) Standard value or calculated functional proof required.

Ulrich Brunner GmbH

Zellhuber Ring 17 - 18

D-84307 Eggenfelden

Phone: +49 / (0)87 21 / 7 71-0

info@brunner.de | www.brunner.de

Subject to technical and assortment changes. Errors excepted.

BRUNNER®

State: 2024-10-30

Planning and installation - BKH Tunnel 50-98 green

- 5) Air cross-sections if the specified nominal heat output is desired as the heat output.
- 6) Fire safety: values determined with air cross-sections evaluated by safety testing; stove cladding is heat emitting. Insulation material data with calcium silicate (Promasil 950KS)/10 cm wall lining + reference insulation material (mineral wool according to AGI Q 132). The specifications for walls/ceilings that do not require protection and are non-combustible correspond to the specifications of TROL (Germany).
- 7) Heat protection panels (accessories) only available for selected fireplace inserts. For assembly and design of the heat protection panel see assembly instructions. Distance between mounted heat protection panel and fireplace insert: rear wall 2 cm, side wall 3 cm.