




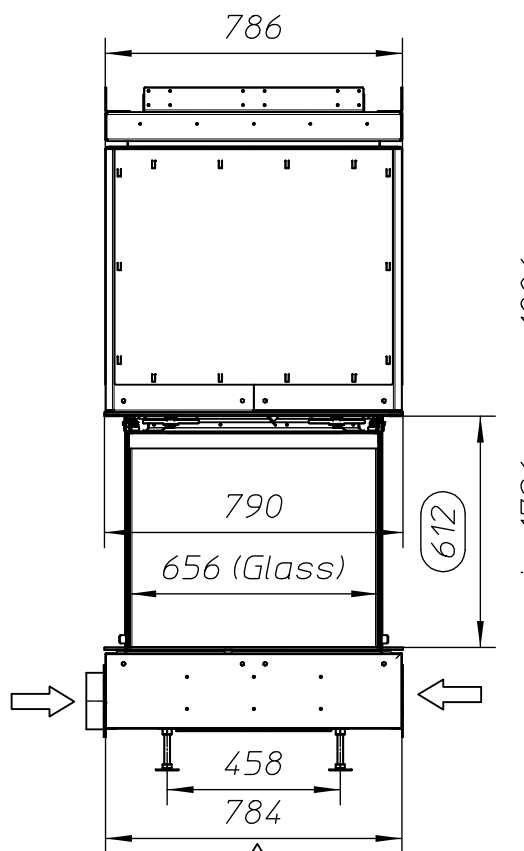



min 1726 - max 1806

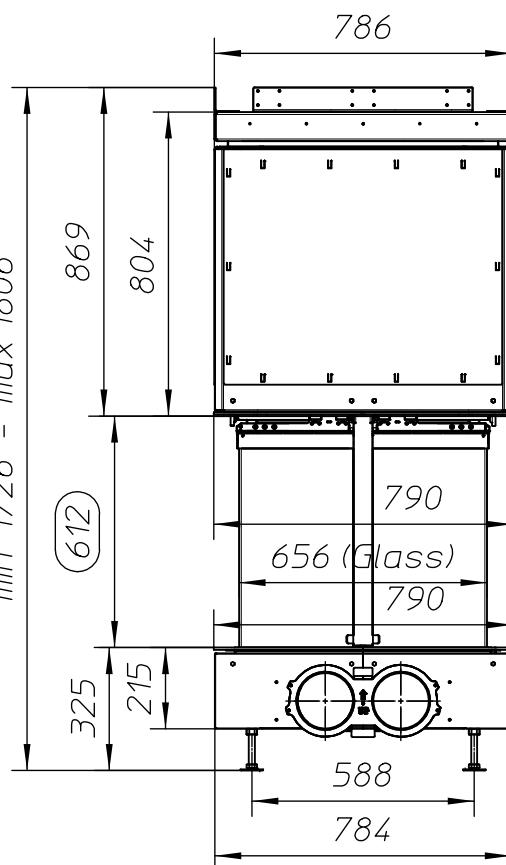

Standard configuration

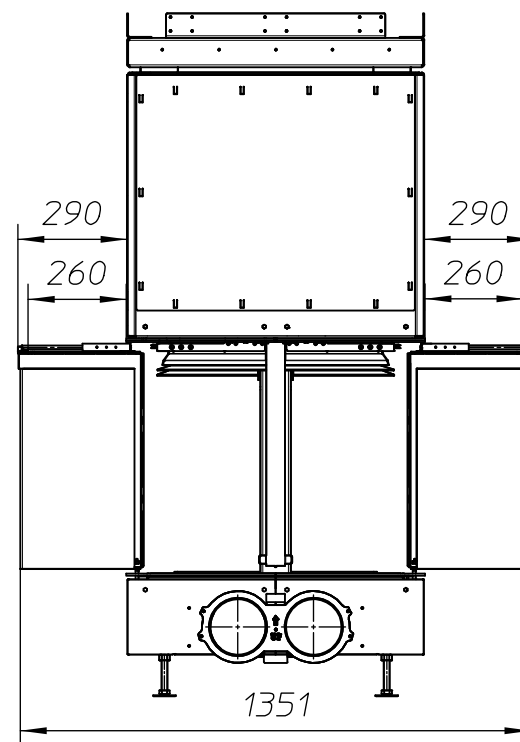

Combustion Air inlet
2xØ150mm Standard Left
(Left/Right/Bottom possible)

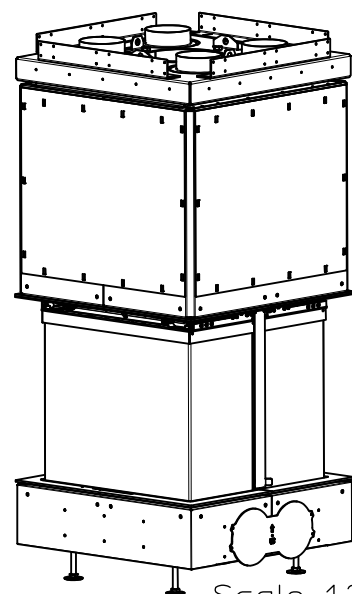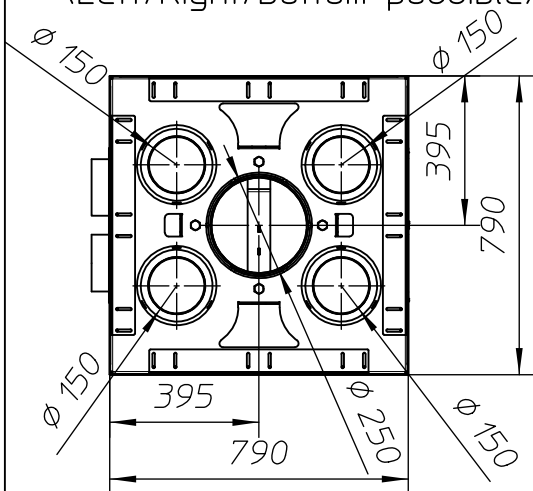

Scale 1:25

Chimney weight
may not exceed 100Kg
If more than 100Kg
use brackets to support
weight of chimney



4 brackets can be
adjusted and used
to support finish

Weight of finish
on brackets
may not exceed
50kg per side

If more
than 50Kg
forsee
brackets
to ceiling
to hold
weight



ULTIME D Patented

Metalfire

Technical Document

ULTIME D MF 700-700-60 WHE 4S

Dimensions (mm)

- combustion opening WxH: 790 X 790 X 612
- external WxDxH: 790 X 790 X 1726
- fresh air intake: 2 x Ø150
- flue gas outlet: Ø250

Technical Data

- ecolabel: A
- capacity: 17.1kW
- efficiency: 79%
- CO (volume with 13%O₂): 0.07%
- dust (volume with 13%O₂): 31mg/Nm³
- weight: 400kg
- convection air inlet: /
- convection air outlet: min.700cm² (4 x Ø150)

First aid and technical support:

- support@metalfire.eu
- +32 9 261 51 90

scale 1:20

www.metalfire.eu


EN 13229

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice


Rev.
A.1

CE


Sheet
1/5

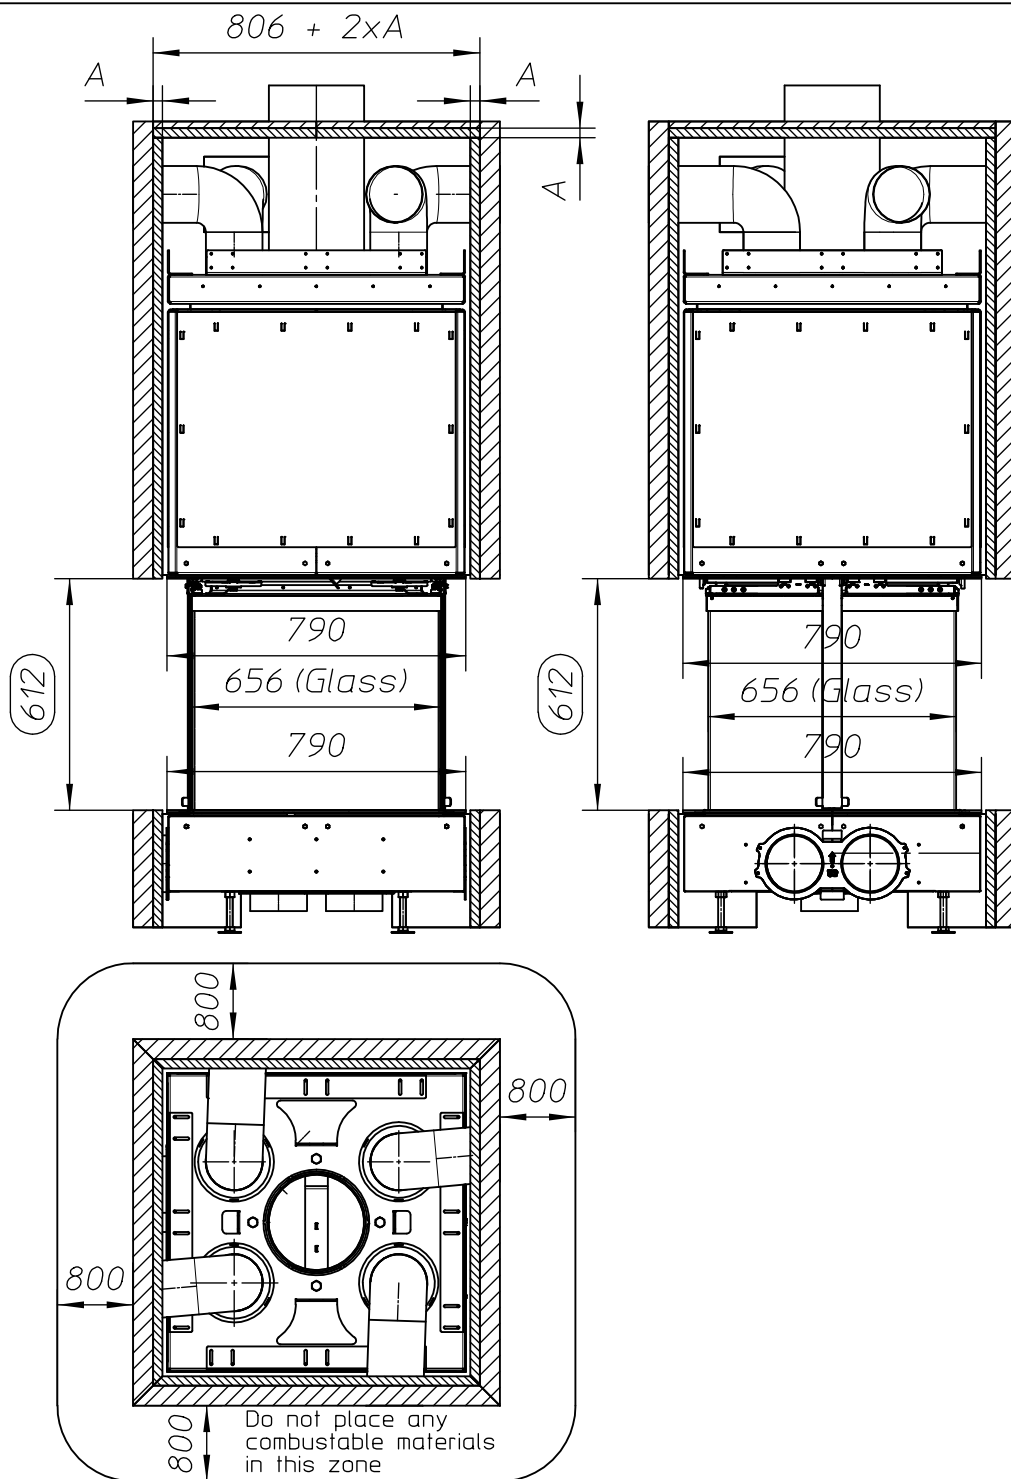

Without finishing frame

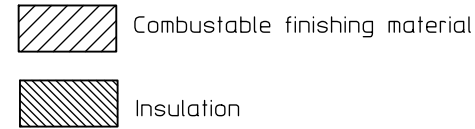

4 x heated convection air

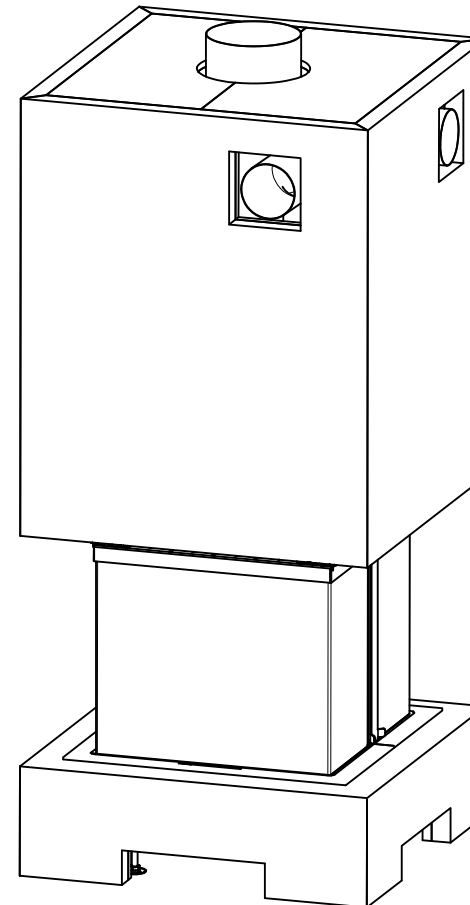

ULTIME D Patented

Metalfire

Technical Document

ULTIME D MF 700-700-60 WHE 4S

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
SILCA T 300
(TC = 0,09 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g. load bearing walls

—

TC = thermal conductivity

NC = non-combustable

First aid and technical support:

- support@metalfire.eu

- +32 9 261 51 90

scale 1:20

Rev.
A.1


www.metalfire.eu

EN 13229

CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
2/5

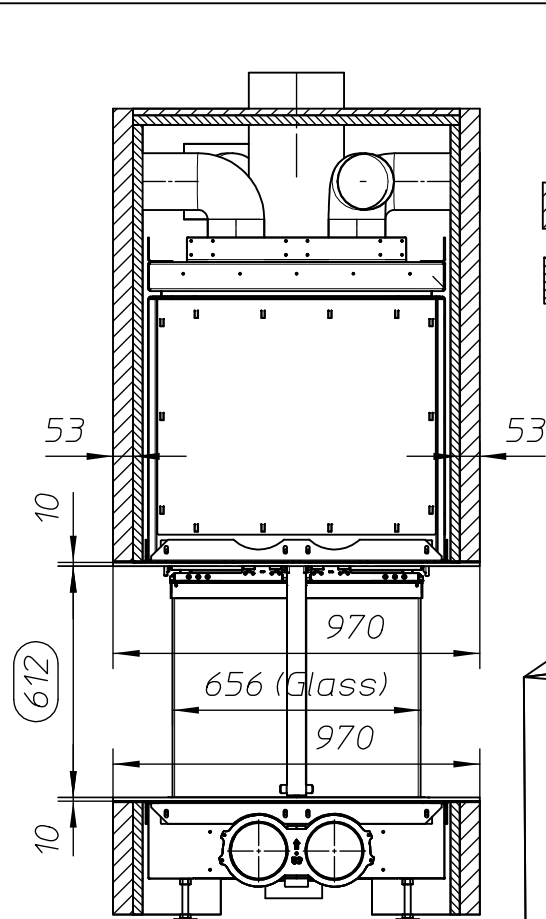

 Combustible finishing material


 Insulation

A line drawing of a square, box-like structure. On top of the box is a cylindrical protrusion. The front face of the box has a square opening. The box is mounted on a base that has a rectangular cutout on its front side.



NC = non-combustable

Sheet
3/5

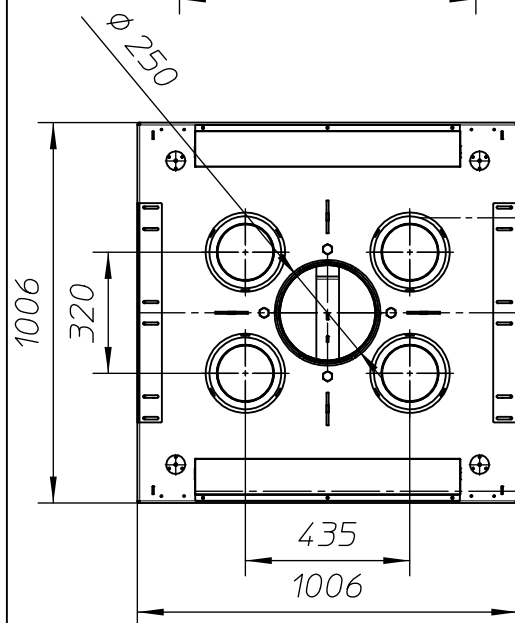

Min 1726 - Max 1806


1006

850

891

588

784

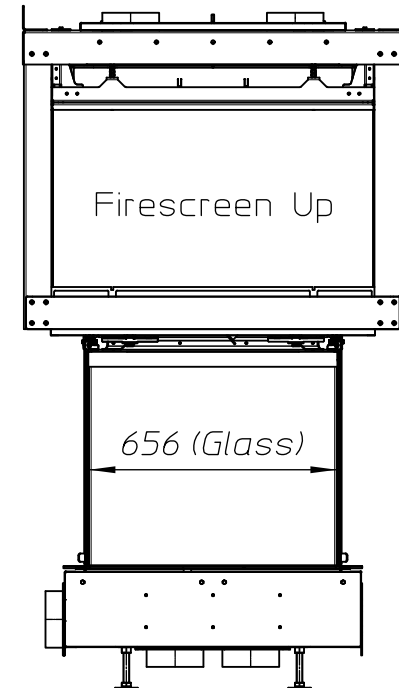



If more than 100Kg
use brackets to
support weight
of chimney

Weight of finish
on brackets
may not exceed
50kg per side

If more than 50Kg forsee brackets to ceiling to hold weight

- ecolabel:	A
- capacity:	17.1kW
- efficiency:	79%
- CO (volume with 13%O2):	0.07%
- dust (volume with 13%O2):	31mg/Nm3
- weight:	400kg
- convection air inlet: /	
- convection air outlet: min.700cm2 (4 x Ø150)	

Sheet
4/5

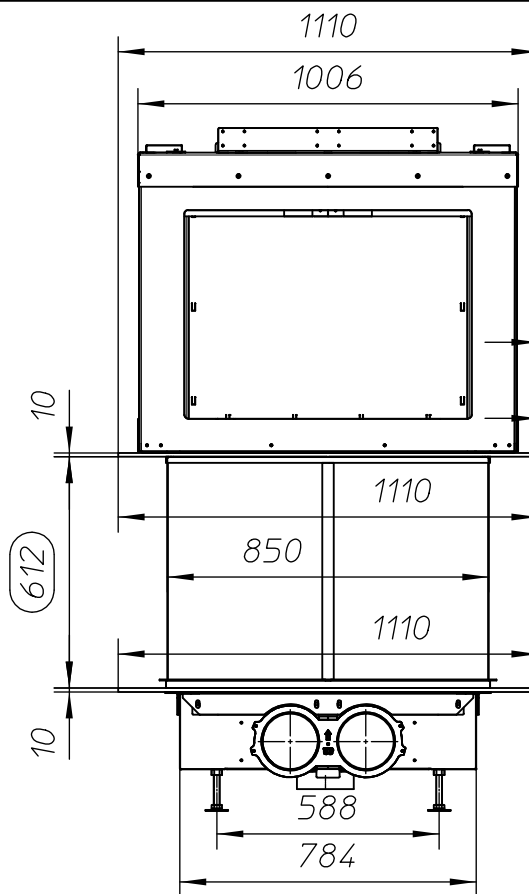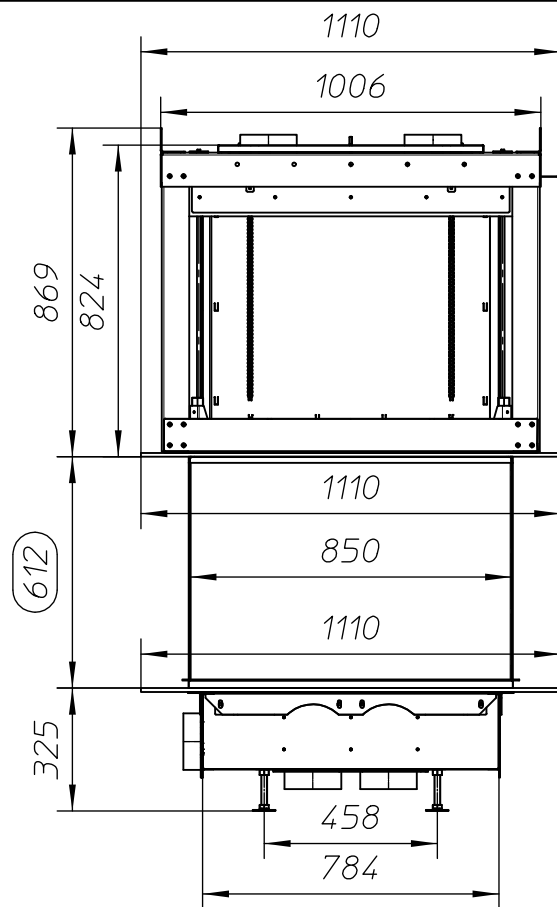

Configuration with firescreen
and finish frame 160/10

126 Opening door outside

98 Opening door inside




Chimney weight
may not exceed 100Kg

If more than 100Kg
use brackets to
support weight
of chimney

4 brackets can be
adjusted and used
to support finish

Weight of finish
on brackets
may not exceed
50kg per side

If more than 50Kg
forsee brackets
to ceiling to hold
weight

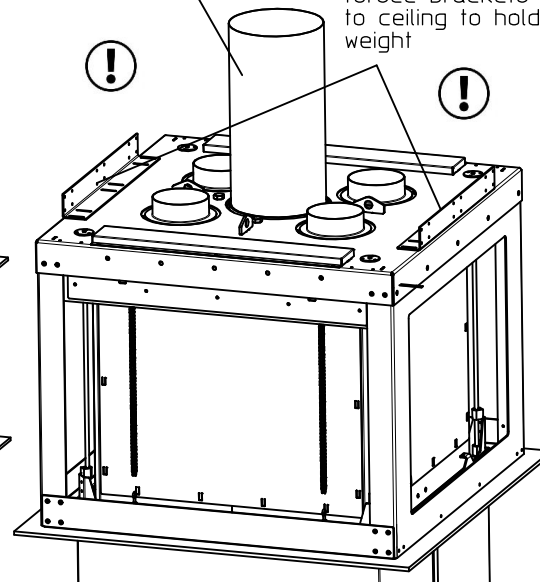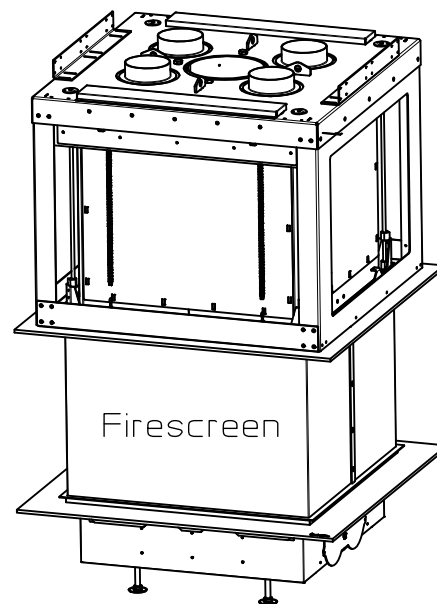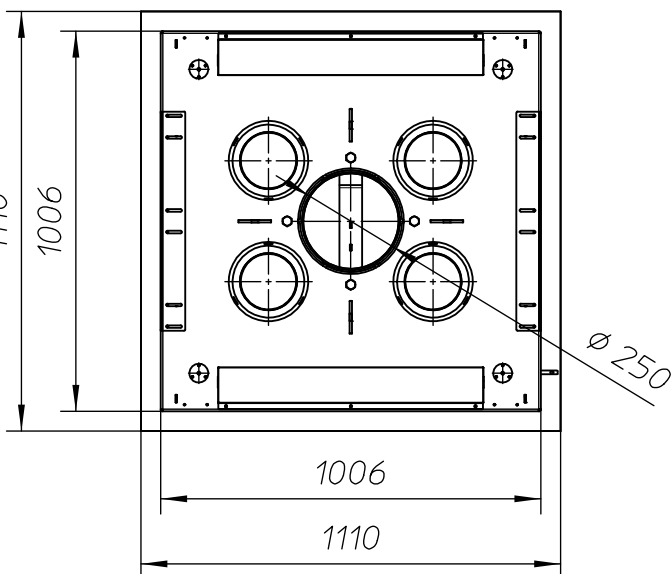

ULTIME D Patented

Metalfire

Technical Document

ULTIME D MF 700-700-60 WHE 4S

Dimensions (mm)

- combustion opening WxH: 1006 X 1006 X 612
- external WxDxH: 1006 X 1006 X 1726
- fresh air intake: 2 x Ø150
- flue gas outlet: Ø250

Technical Data

- ecolabel: A
- capacity: 17.1kW
- efficiency: 79%
- CO (volume with 13%O₂): 0.07%
- dust (volume with 13%O₂): 31mg/Nm³
- weight: 400kg
- convection air inlet: /
- convection air outlet: min.700cm² (4 x Ø150)

First aid and technical support:

- support@metalfire.eu
- +32 9 261 51 90

scale 1:20

www.metalfire.eu

EN 13229

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Rev.
A.1

CE

Sheet
5/5