
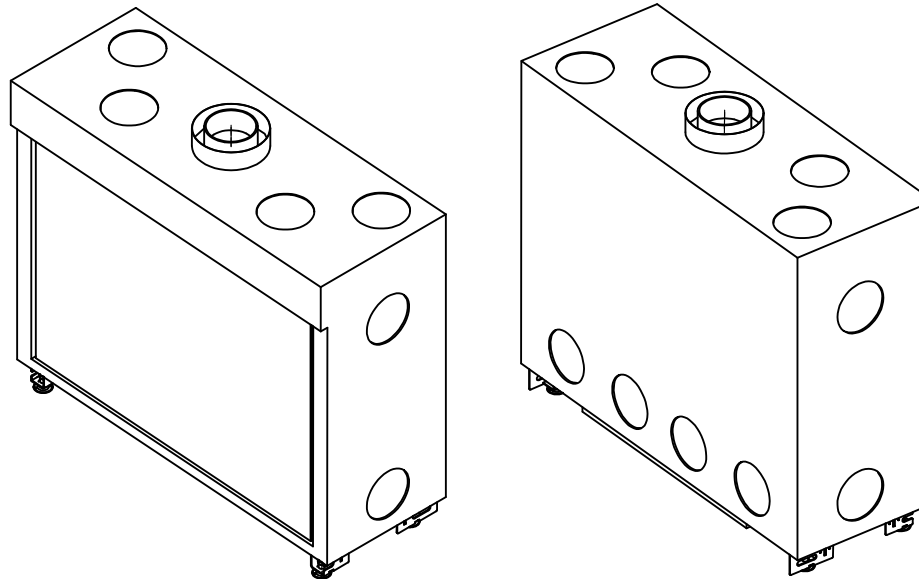
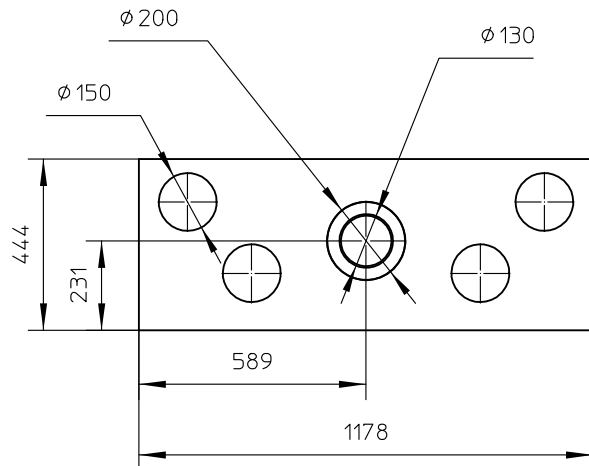
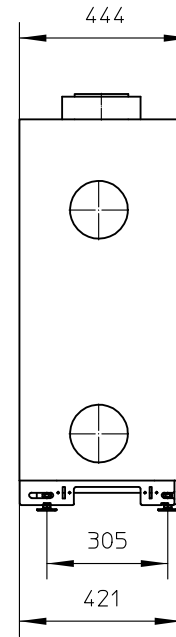


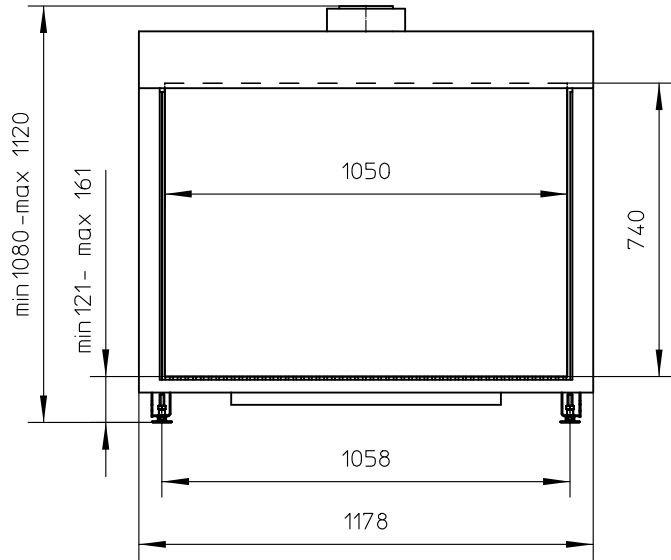

AVENUE Patented

metalfire

Technical Document

AVENUE MF 1050-75 GHE 1S

Dimensions (mm)

- combustion opening WxH: 1050x740
- external WxDxH: 1178x444x1120
- diameter flue: Ø130/200 or
(*) Ø100/150

TECHNICAL DATA

- Gascat: I2E+, I2E, I2H, I2L, I2ELL
 - ECOLABEL: A
 - load input: 11,00 kW
 - load output: 9,50 kW
 - efficiency capacity: 87,0 %
 - type of gas/pressure: G20/G25

- Gascat: I3B/P, I3+
 - ECOLABEL: B
 - load input: 8,70 kW
 - load output: 7,30 kW
 - efficiency capacity: 84,4 %
 - type of gas/pressure: G30/G31

- Appliance type: C11,C31,C91
C12,C32,C42,C52,C82
- Weight: 150 kg
- Convection air inlet: min700cm2 (4xØ150)
- Convection air outlet: min700cm2 (4xØ150)

SPECIFICATIONS

- Only available with ceramics wood logs
- Ionization-protected pilot-flame
- Radiographic remote controle with thermostatic mode
- Inside finishing: heat-resistant black paint
- Gas/electrical connections at the left side
(optional right side)

OPTIONS

- interior finishing: ORIGINAL (ribbed cast iron)
Standard (steel)

First aid and technical support:

- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20


www.metalfire.eu

EN 613



CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice


Sheet
1/3

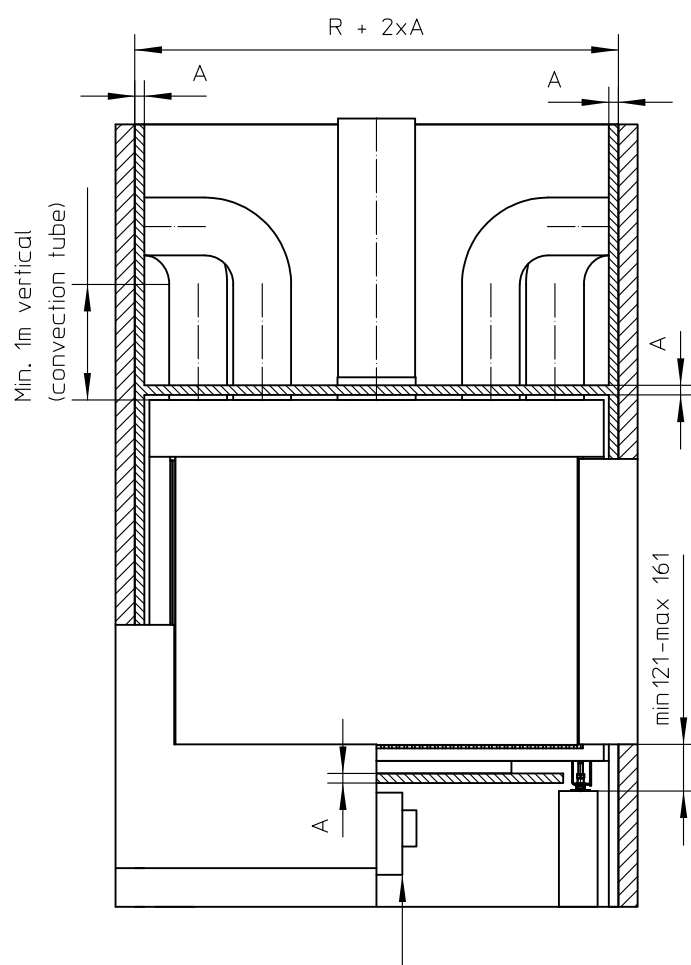

Electrical/gas control unit
Standard connected with 1m flexible tube.
Optional: connected on right side and/or with an additional 1m tube(AT ORDER)
FORESEE ENOUGH AIR FLOW FOR COOLING

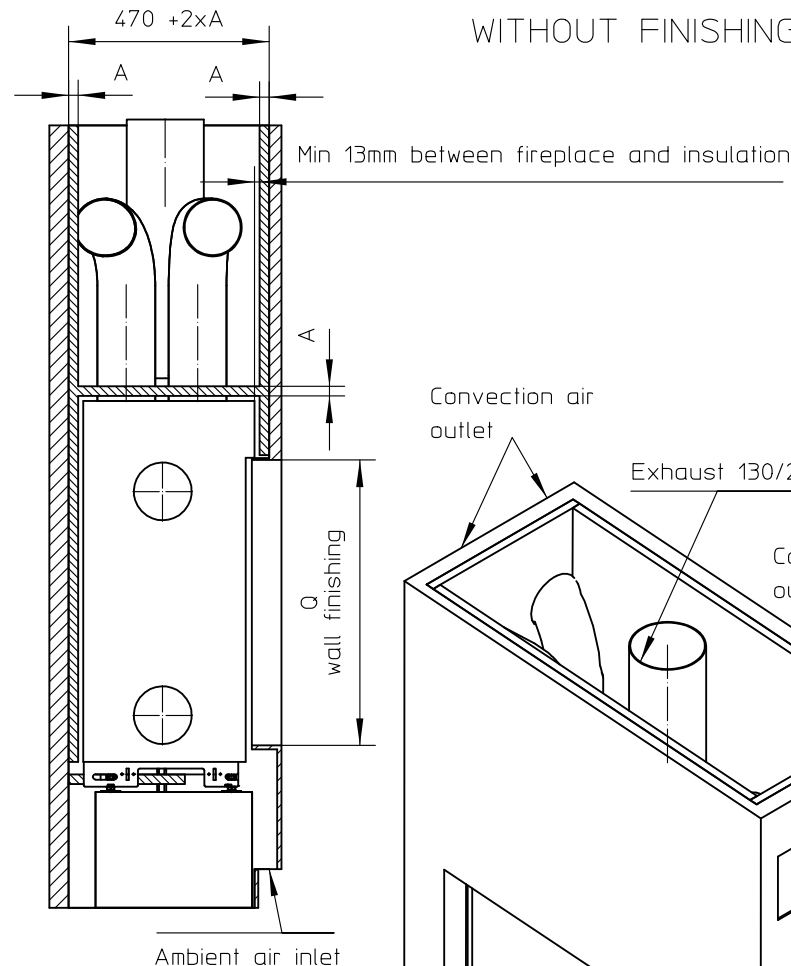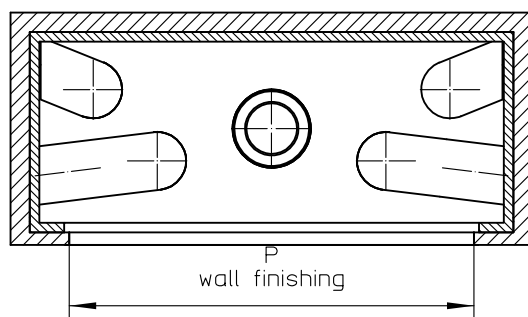

WITHOUT FINISHING FRAME

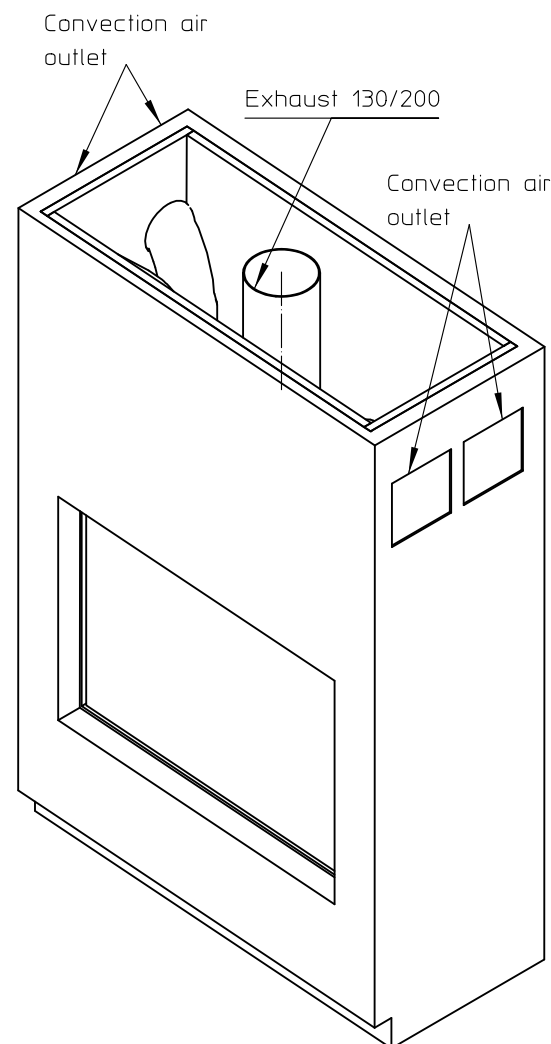

Combustable finishing material
Insulation

Insulation thickness = > see table

AVENUE Patented

metalfire

Technical Document

AVENUE MF 1050-75 GHE 1S

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
Promasil 1100L
(TC=0,081 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g load bearing walls

A = 0mm

TC=thermot conductivity

TC=non-combustable

Table: AVENUE MF 1050-75 GHE 1S

Installation dimensions (mm)

P	Q	R	S	T	Z
1050	740	1204	1076	766	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

Rev.

www.metalfire.eu

EN 613

CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
2/3

WITH FINISHING FRAME 90/10

AVENUE_{Patented}

metalfire

Technical Document

AVENUE MF 1050-75 GHE 1S

Prescribed insulation thickness (mm)

Combustable finishing material

Metalfire recommended
Promasil 1100L
(TC=0,081 W/mK)

A = 25mm

Non-combustable finishing material

non-combustable
materials
structural building items
EXCLUDED e.g load bearing walls

A = 0mm

TC=thermot conductivity

TC=non-combustable

Table: AVENUE MF 1050-75 GHE 1S

Installation dimensions (mm)

P	Q	R	S	T	Z
1050	740	1204	1076	766	NA

First aid and technical support:
- support@metalfire.eu
- +32 (0)9 261 50 57

scale 1:20

www.metalfire.eu


EN 613

Rev.




CE

General dimensional tolerances up to 6mm
Metalfire preserves the right to modify specifications without previous notice

Sheet
3/3

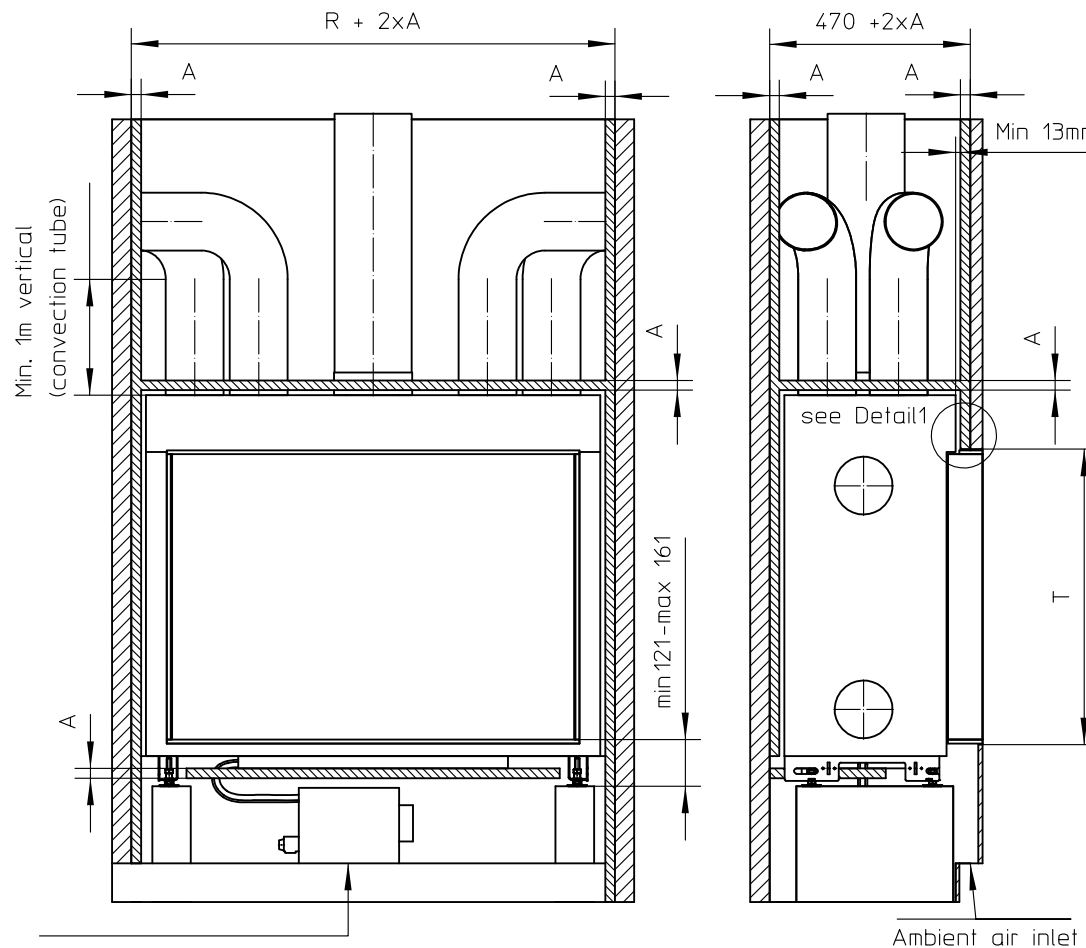

Electrical/gas control unit
Standard connected with 1m flexible tube.
Optional: connected on right side and/or with an additional 1m tube(AT ORDER)
FORESEE ENOUGH AIR FLOW FOR COOLING

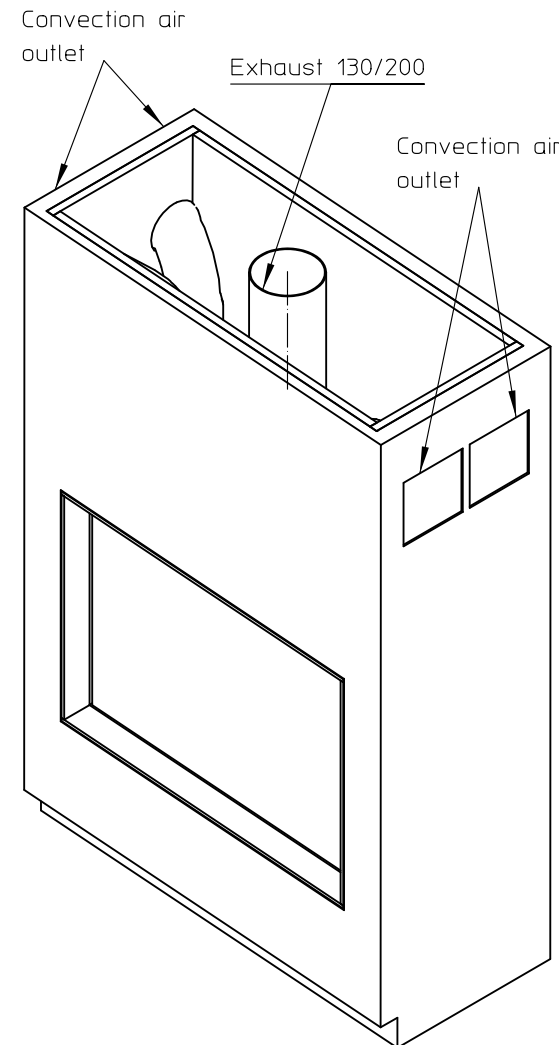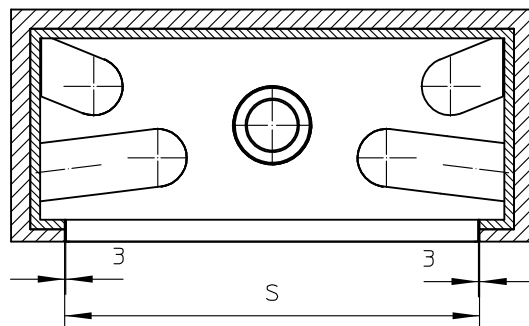

Combustable finishing material

Insulation

Insulation thickness = > see table